

PROFESSIONALS SINCE 1898

2014/15



Contents 2

AEG POWERTOOLS

promises to draw upon its heritage and deliver exciting, high performance, innovative working solutions for the professional tradesmen of today and the future.

CORDLESS SYSTEMS	06 - 27
OMNIPRO	10-11
18 V POWER	12-17
14,4 V POWER	18 – 19
12 V POWER	20-24
3,6 V POWER	25 – 25
FLASHLIGHTS/BATTERY LAMPS	25 – 25
BATTERIES & CHARGERS	26-27
HAMMER SYSTEMS	28 - 37
ROTARY HAMMERS	31-31
COMBI HAMMERS	31-35
CHIPPING HAMMERS	34-36
LARGE DEMOLITION HAMMERS	36-36
DRILLING SYSTEMS	38-45
ROTARY DRILLS	40-40
PERCUSSION DRILLS	41-43
DIAMOND DRILL	44-44
WALL CHASER	44-44
SCREWDRIVERS	45 – 45
METALWORKING	46-59
METALWORKING SMALL ANGLE GRINDERS	46 - 59 49 - 53
SMALL ANGLE GRINDERS	49 – 53
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS	49 – 53 54 – 56
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS DIE GRINDERS	49 - 53 54 - 56 57 - 57
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS DIE GRINDERS POLISHER	49 - 53 54 - 56 57 - 57 58 - 58
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS DIE GRINDERS POLISHER RIGHT ANGLE SANDER	49 - 53 54 - 56 57 - 57 58 - 58 58 - 58
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS DIE GRINDERS POLISHER RIGHT ANGLE SANDER ABRASIVE METAL CHOPSAW	49-53 54-56 57-57 58-58 58-58 59-59
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS DIE GRINDERS POLISHER RIGHT ANGLE SANDER ABRASIVE METAL CHOPSAW WOODWORKING	49-53 54-56 57-57 58-58 58-58 59-59
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS DIE GRINDERS POLISHER RIGHT ANGLE SANDER ABRASIVE METAL CHOPSAW WOODWORKING ROUTERS	49-53 54-56 57-57 58-58 58-58 59-59 60-75
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS DIE GRINDERS POLISHER RIGHT ANGLE SANDER ABRASIVE METAL CHOPSAW WOODWORKING ROUTERS PLANER	49-53 54-56 57-57 58-58 58-58 59-59 60-75 62-63 63-63
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS DIE GRINDERS POLISHER RIGHT ANGLE SANDER ABRASIVE METAL CHOPSAW WOODWORKING ROUTERS PLANER JIGSAWS	49-53 54-56 57-57 58-58 58-58 59-59 60-75 62-63 63-63 64-65
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS DIE GRINDERS POLISHER RIGHT ANGLE SANDER ABRASIVE METAL CHOPSAW WOODWORKING ROUTERS PLANER JIGSAWS CIRCULAR SAWS	49-53 54-56 57-57 58-58 58-58 59-59 60-75 62-63 63-63 64-65 66-67
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS DIE GRINDERS POLISHER RIGHT ANGLE SANDER ABRASIVE METAL CHOPSAW WOODWORKING ROUTERS PLANER JIGSAWS CIRCULAR SAWS RECIPROCATING SAWS	49-53 54-56 57-57 58-58 58-58 59-59 60-75 62-63 63-63 64-65 66-67 68-68
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS DIE GRINDERS POLISHER RIGHT ANGLE SANDER ABRASIVE METAL CHOPSAW WOODWORKING ROUTERS PLANER JIGSAWS CIRCULAR SAWS RECIPROCATING SAWS SANDERS	49-53 54-56 57-57 58-58 58-58 59-59 60-75 62-63 63-63 64-65 66-67 68-68 69-70
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS DIE GRINDERS POLISHER RIGHT ANGLE SANDER ABRASIVE METAL CHOPSAW WOODWORKING ROUTERS PLANER JIGSAWS CIRCULAR SAWS RECIPROCATING SAWS SANDERS TABLE SAW	49-53 54-56 57-57 58-58 58-58 59-59 60-75 62-63 63-63 64-65 66-67 68-68 69-70 71-71
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS DIE GRINDERS POLISHER RIGHT ANGLE SANDER ABRASIVE METAL CHOPSAW WOODWORKING ROUTERS PLANER JIGSAWS CIRCULAR SAWS RECIPROCATING SAWS SANDERS TABLE SAW MITRE SAWS	49-53 54-56 57-57 58-58 58-58 59-59 60-75 62-63 63-63 64-65 66-67 68-68 69-70 71-71 72-73
SMALL ANGLE GRINDERS LARGE ANGLE GRINDERS DIE GRINDERS POLISHER RIGHT ANGLE SANDER ABRASIVE METAL CHOPSAW WOODWORKING ROUTERS PLANER JIGSAWS CIRCULAR SAWS RECIPROCATING SAWS SANDERS TABLE SAW MITRE SAWS MITRE SAW LEGSTAND	49-53 54-56 57-57 58-58 58-58 59-59 60-75 62-63 63-63 64-65 66-67 68-68 69-70 71-71 72-73 73-73



Features Key



FIXTEC System

For changing accessories in seconds.



Keyless Safety GuardSafety guard adjustment without the use of a tool.



Impact Driver

For heavy duty screwdriving applications.



Anti-Vibration-System

Significantly reduces vibration by up to 50%.



Soft Hammer Mode

Reduces blow energy for increased control.



1/4" quick release hex fitment.



Safety Clutch

Protects user and machine if a drill bit should jam.



2-Speed Gear

2-speed gearbox, for optimum speed to suit application.



Pendulum Action

For a faster, more aggressive cut.



Dust Extraction

Integrated dust extraction for a clean working



Drill OnlySingle mode – rotary drilling.



Kitbox

Heavy duty kitbox.



With variable speed pre-selection, soft start, constant speed and overload protection.



Drill And Hammer Drill

2 mode – rotary and rotary hammer drilling.



Heavy duty kitbag.



L.E.D.

For workplace illumination.



Chisel And Hammer Drill

2 mode – rotary hammer drill with chipping/ demolition function.



Crosscut Capacity

Maximum crosscut capacity of saw.



Metal Chuck

For enhanced durability.



Combi Hammer

3 mode – rotary and rotary hammer drilling with chiselling/demolition function.



Mitre Saw Blade

Projects the cut line onto material.



Rotatable Handle

Provides optimum comfort during grinding and cutting.



Chisel Drill

Chiselling/demolition machine.



Mitre Capacity

Maximum mitre angle right and left.



Diamond System

Designed for maximum performance when used with diamond accessories.



Hook And Loop

Easy sandpaper attachment without the clamps.



Bevel Capacity

Maximum bevel angle right and left.



Gears Integrated into Chuck



Cutting Capacity

Bevel Cut Capacity



Belt Clip on the Tool



Cutting Width



Bevel Cut Angle



Max. Cutting Depth



Stroke Length



Sanding Belt Length

PROFESSIONALS SINCE 1898

Since being founded, **AEG POWERTOOLS** has been leading the way in new product development. By introducing the first transportable drilling machines in 1898, portable powertools were born. Over 100 years later AEG are still offering the professional user innovative, powerful solutions ...

PROUD PAST...
EXCITING FUTURE...





TOTAL CORDLESS POWER

AEG POWERTOOLS

offer today's professional user a wide range of innovative, powerful cordless solutions that are capable of performing in the toughest conditions.

THE CORDLESS SYSTEM RANGE



OMNIPRO

18 V POWER

14,4 V POWER

12 V POWER

3,6 V POWER

FLASHLIGHT / BATTERY LAMPS

BATTERIES & CHARGERS





The complete Lithium-Ion range

18 PRO LITHIUM ION

Split into compact and heavy duty products, the AEG POWERTOOLS 18 V Pro Lithium-lon range offers the power and performance required for more substantial applications, but offers the flexibility of more compact units with 2,0 Ah batteries, or heavy duty products using 4,0 Ah batteries.





PRO LITHIUM ION TECHNOLOGY



14.40 PRO LITHIUM ION

The 14,4 V Pro Lithium-lon range from AEG POWERTOOLS strike a balance between ergonomics, comfort and power. Slightly bigger and heavier than the 12 V range, they offer more power and run time, but are still lighter than their 18 V counterparts.

Products in this range:





12v PRO Lithium ion

The AEG POWERTOOLS range of 12 V Pro Lithium-lon products are ideal for applications which require a lightweight ultracompact unit. The Pro Lithium cells still provide optimum power to suit this type of task, and also benefit from a 30 minute charge time, and have overload protection built into the product to ensure maximum durability of the battery and the tool.

Products in this range:



All batteries and charger are fully backwards compatible



3 BODIES, 7 HEADS, 100+ APPLICATIONS



POWERING PROFESSIONALS SINCE 1898



OMNIPRO 12 V BASE UNIT

OMNI 12C

The OMNI 12C offers users the ultimate in ergonomics. The light weight, compact body is ideal for working in tight spaces.

FEATURES

- Tool free interchangeable heads to easily switch between a wide range of applications
- Large 2 finger switch with adjustable speed
- One handed use of applications
- LED for work place illumination
- Small and compact for working in tight environments

SPECIFICATIONS	OMNI 12C
Battery voltage	12 V
No load oscillation rate	20000 min ⁻¹
Oscillation angle left/right	1,5°/1,5°





ergonomi<u>cs</u>

OMNIPRO 18 V BASE UNIT

OMNI 18C

The OMNI 18C gives more power and more runtime than the 12 V power base, whilst keeping the advantage of cordless portability.

FEATURES

- Tool free interchangeable heads to easily switch between a wide range of applications
- Large 2 finger switch with adjustable speed
- One handed use of applications
- Optimum power to weight ratio
- LED for work place illumination
- Built in fuel gauge

SPECIFICATIONS	OMNI 18C
Battery voltage	18 V
No load oscillation rate	20000 min ⁻¹
Oscillation angle left/right	1,5°/1,5°













ONE SYSTEM

OMNIPRO is a revolutionary system allowing users to tailor their system depending on application. All heads and bodies are interchangeable to select the best balance of power base and head for ultimate productivity.

Cat No. OMNI 12C Li-152B KIT3

EAN No. 4002395134830

Version. 12 V power handle, multitool head, jigsaw head,

accessories, 2 batteries, charger, bag



CHOOSE YOUR **SYSTEM**

OMNIPRO AC BASE UNIT

OMNI 300

The OMNI 300 is the choice for longer applications where a cordless machine is not required, with all the power expected from an AC machine.

FEATURES

- Tool free interchangeable heads to easily switch between a wide range of applications
- Large 2 finger switch with adjustable speed
- One handed use of applications
- LED for work place illumination
- Mains machine

SPECIFICATIONS	OMNI 300
Power	300 W
No load oscillation rate	20000 min ⁻¹
Oscillation angle left/right	1,5°/1,5°

RUNTIME



OMNI 12C

Cat No. OMNI 12C Li-152B KIT1

Version. 12 V power handle, multitool head, accessories,

2 x 1.5 Ah batteries, charger, bag

EAN No. 4002395134809

Cat No. OMNI 12C Li-152B KIT2

Version. 12 V power handle, multitool head, right angle drill head,

accessories, 2 batteries, charger, bag

EAN No. 4002395134816

OMNI 18C

Cat No. OMNI 18C LI-152C KIT1

Article No. 4935 4406 44

Version. 18 V power handle, multitool head, accessories, 2 x 1.5 Ah batteries, charger, bag

EAN No. 4002395134632

Article No. 4935 4406 45

18 V power handle, multitool head, no batteries or charger supplied

(accessories are also delivered with the 0 version) EAN No. 4002395134649

OMNI 300

Cat No. OMNI 300 KIT1

Article No. 4935 4317 90

Version. AC Multitool, multitool head, accessories, soft bag

EAN No. 4002395194995





18 V PREMIUM HAMMERDRILL/DRIVER



BSB 18 Li

Features

- New high performance open frame motor
- Compact & powerful for high torque applications
- 80 Nm maximum torque delivers complete power
- Full metal gearbox and housing for superior durability
- 2-speeds 0-450/0-1600 rpm
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm full metal Rohm keyless chuck, with spindle lock
- LED for work place illumination
- 3 mode selector ease of use between applications
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specification

2 x 4,0 Ah
30 min*
2,5 kg
55/13/16 mm

Chuck	1,5-13 mm
Max torque	80 Nm
No load speed	0-450/0-1600 грт
Percussion rate	7200-25.600 bpm
Voltage	18 V

Standard Equipment – 2 x batteries, charger, side handle and kitbox





















Cat No. BSB 18 Li-402C Article No. 4935 4434 52 Version. 2 x 4,0 Ah Li-lon batteries, 30 min* charger EAN No. 4002395135769

18 V COMPACT HAMMERDRILL/DRIVER



BSB 18C Li

Features

- New 4 poles frameless motor and compact gearbox
- Compact & powerful for high torque applications
- Only 202 mm in length
- 60 Nm (2,0 Ah) / 70 Nm (4,0 Ah) maximum torque delivers complete power
- 2-speeds 0-450/0-1650 rpm
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm keyless chuck, with spindle lock
- LED for work place illumination
- 3 mode selector ease of use between applications
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specification

No. of batteries	2 x 2,0 Ah
Charger	30 min*
Weight with battery	1,8 kg
Drilling	
wood/metal/masonry	45/13/14 mm

Chuck	1,5-13 mm
Max torque	60 Nm
No load speed	0-450/0-1650 rpm
Percussion rate	5850-21.450 bpm
Voltage	18 V

Standard Equipment – 2 x batteries, charger, side handle and kitbox



ALSO AVAILABLE: 4,0 Ah Li-Ion version























Cat No. BSB 18C Li-202C Article No. 4935 4439 80 Version. 2 x 2,0 Ah Li-Ion batteries, 30 min* charger EAN No. 4002395135684 Cat No. BSB 18C Li-402C Article No. 4935 4439 97 Version. 2 x 4,0 Ah Li-lon batteries, 30 min* charger EAN No. 4002395135745

* Charge times based on 1,5 Ah Li-Ion battery

BSB 18 G2 Li

Features

- Compact & powerful for completion of all jobsite applications
- 50 Nm maximum torque delivers complete power
- 2 speeds 0-400/0-1500 rpm
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm single sleeve full metal chuck
- 3 mode selector ease of use between functions
- Built in fuel gauge
- LED for work place illumination
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool



No. of batteries	2 x 1,5 Ah
Charger	60 min*
Weight with battery	1,9 kg
Drilling wood/metal/masonry	34/13/12 mm

50 Nm
0-400/0-1500 rpm
18 V

Standard Equipment – 2 x batteries, charger and kitbox





















Cat No. BSB 18 G2 Li-152C Article No. 4935 4339 70 Version. 2 x 1,5 Ah Li-lon batteries, 60 min* charger EAN No. 4002395134489

18 V DRILL/DRIVER

BS 18 G2 Li

Features

- Compact & powerful for completion of all jobsite applications
- 50 Nm maximum torque delivers complete power
- 2-speeds 0-400/0-1500 rpm
- 24 stage torque adjustment for complete control
- FIXTEC 13 mm single sleeve full metal chuck
- Built in fuel gauge
- LED for work place illumination
- Features AEG Pro Lithium-lon battery technology with overload protection for maximum durability of battery and tool

Specification

No. of batteries	2 x 1,5 Ah
Charger	60 min*
Weight with battery	1,8 kg
Drilling metal/wood	13/34 mm

Chuck	1,5-13 mm
Max torque	50 Nm
No load speed	0-400/0-1500 грт
Voltage	18 V

Standard Equipment – $2 \times \text{batteries}$, charger and kitbox






















18 V ULTRA COMPACT DRILL/DRIVER



BS 18C Li

ALSO AVAILABLE: 4.0 Ah Li-Ion version

Features

- New 4 poles frameless motor and compact gearbox
- Small, compact & powerful for high torque applications
- Only 186 mm in length
- 60 Nm (2,0 Ah) / 70 Nm (4,0 Ah) maximum torque delivers complete power
- 2-speeds 0-450/0-1650 rpm
- Integrated clutch and chuck for a more compact design
- LED for work place illumination
- Forward and reverse
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specification

No. of batteries	2 x 2,0 Ah
Charger	30 min*
Weight with battery	1,8 kg
Drilling wood/metal	45/13 mm

Chuck	1,5-13 mm
Max torque	60 Nm
No load speed	0-450/0-1650 rpm
Voltage	18 V

Standard Equipment – 1 x double ended bit, 2 x batteries, charger, side handle and kitbox

















Cat No. BS 18C Li-202C Article No. 4935 4439 77 Version. 2 x 2,0 Ah Li-Ion batteries, 30 min* charger EAN No. 4002395135677 Cat No. BS 18C Li-402C Article No. 4935 4439 94 Version. 2 x 4,0 Ah Li-Ion batteries, 30 min* charger EAN No. 4002395135738

18 V ULTRA COMPACT IMPACT WRENCH



BSS 18C Li-0





- Only 145 mm overall length
- 158 Nm maximum torque
- Delivers up to 3100 impacts per minute for increased productivity
- Industrial metal gearbox and gears for extended life
- 1/4" Hex bit reception
- Built in LED illuminates work surface
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specification

Weight with battery	2,0 kg
Max torque	158 Nm
No load speed	0-2400 грт

Impact rate	0-3100 ірт
Tool reception	1/4" Hex
Voltage	18 V

Standard Equipment - 1 x single PZ2 bit















18 V ULTRA COMPACT IMPACT WRENCH



BSS 18C 12Z Li

ALSO AVAILABLE: 0-version

Features

- Ultra compact, well balanced impact wrench
- Only 203 mm overall length
- 360 Nm maximum torque
- Delivers 0-3200 impacts per minute for increased productivity
- Industrial metal gearbox and gears for extended life
- ½" Square reception and delivered with ½" square → ¼" hex adaptor for screwdriving
- Built in LED illuminates work surface
- Built in Triple LED for perfect illumination of the work surface without any shadow effect



No. of batteries	2 x 4,0 Ah
Charger	30 min*
Weight with battery	2,3 kg
Max torque	360 Nm

No load speed	0-2900 грт
Impact rate	0-3200 ірт
Tool reception	½" Square
Voltage	18 V

Standard Equipment - 2 x batteries, charger and kitbox, ½" Square → ¼" hex adaptor









U Lithium ion





Cat No. BSS18C12Z Li-402C Article No. 4935 4464 56 Version. 2 x 4,0 Ah Li-lon batteries, 30 min* charger EAN No. 4002395136254
Cat No. BSS18C12Z-0 Article No. 4935 4464 49 Version. Zero version – no batteries, charger or kilbox EAN No. 4002395136247

18 V SDS-PLUS HAMMER

L-shape SDS hammer for drilling and fixing into concrete up to 24 mm

2,3 Joule impact energy delivers high performance

• Rotary stop for light chiselling applications

- Hammer action stop for rotary drilling in wood and metal
- Metal gearbox for extended durability
- Safety clutch for user protection


Features

• Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specification

No. of batteries	2 x 4,0 Ah
Charger	30 min*
Weight with battery	3,5 kg
Drilling	
concrete/steel/wood	24/13/30 mm

2,3 J EPTA
1400 грт
0–4200 bpm
18 V





















O LİTHIUM ION















ALSO AVAILABLE: 0-version

BBH 18 Li



18 V PENDULUM ACTION RECIPROCATING SAW

BUS 18 Li-0

Features

- Pendulum action for increased performance
- 3600 strokes per minute and 19 mm stroke length for fast cutting applications
- Robust bladeclamp for demolition applications
- FIXTEC for fast and easy keyless blade change
- Adjustable shoe
- Saw blade can be turned 180° for various applications
- Variable speed trigger
- Soft-grip
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool



Specification

Weight with battery	3,5 kg
Stroke lenath	19 mm

Strokes per minute	0-3600 spm
Voltage	18 V

Standard Equipment - 2 x blades















Cat No. BUS 18-0 Article No. 4935 4313 70 Version. Zero version – no batteries, charger or kitbox EAN No. 4002395132805

18 V HEAVY DUTY CIRCULAR SAW

BKS 18 Li-0

Features

- Compact, light and well balanced
- Extremely fast cutting speed of 5000 rpm
- Magnesium base and upper guard for durability
- Large 50° bevel capacity
- Electronic motor brake, saw blade stops within seconds
- Lock off switch for safety
- Spindle lock for fast blade changing
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specification

Weight with battery	3,4 kg
Saw blade Ø	165 mm
Arbor	15,87 mm (5/s²
Bevel capacity	50
No load speed	5000 грп

Cutting depth	
at 45°	0-41 mm
Cutting depth	
at 90°	0-54 mm
Voltage	18 V

Standard Equipment - 165 mm TCT blade, side fence















Cat No. BKS 18-0 Article No. 4935 4313 75 Version. Zero version – no batteries, charger or kitbox EAN No. 4002395132812

18 V HEAVY DUTY JIGSAW

BST 18X-0

Features

- Pendulum action for increased cutting performance
- Metal gearbox for extended durability
- Professional, die-cast aluminium base plate
- Patented FIXTEC system for fast keyless blade change
- Variable speed trigger
- Ergonomic soft-grip for comfortable use
- Electronic motor brake



Specification

Stroke	26 mm
No load stroke rate	0-2050 spm
Weight with battery	3,5 kg

to 45°
80 mm
18 V

Standard Equipment – Plastic shoe cover, anti splintering device, $2 \times \text{blades}$













Cat No. BST 18X-0 Article No. 4935 4131 30 Version. Zero version - no batteries, charger or kitbox EAN No. 4002395197460

18 V HEAVY DUTY ANGLE GRINDER

BEWS 18-125X

Features

- Compact and powerful cordless angle grinder
- Overload protection with LED warning
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Fast and tool-free disc change with patented FIXTEC nut
- Built in fuel gauge
- AEG Pro Lithium-Ion battery technology for maximum durability of battery and tool

ALSO AVAILABLE: with disc Ø 115 mm ALSO AVAILABLE: 0-versions



Specification

2 x 4,0 Ah
30 тіп*
2,5 kg
9000 rpm

Cutting depth Ø 115 mm	28 mm
Ø 125 mm	33 mm
Spindle thread	M14
Voltage	18 V

Standard Equipment - Grinding keyless guard, 2 batteries 18 V/4,0 Ah Pro Lithium-Ion, 30 min charger, FIXTEC nut, flange nut, AVS side handle and kitbox





















Cat No. BEWS 18-125X Li-402C Article No. 4935 4434 60 Version. 2 x 4,0 Ah Li-lon batteries, 30 min* charger EAN No. 4002395135790 Cat No. BEWS 18-125X-0 Article No. 4935 4319 98 Version. Zero version – no batteries, charger or kithox EAN No. 4002395132980 Cat No. BEWS 18-115X Li-402C Article No. 4935 4434 63 Version. 2 x 4,0 Ah Li-lon batteries, 30 min* charger EAN No. 4002395136001 Cat No. BEWS 18-115X-0 Article No. 4935 4333 19 Version. Zero version – no batteries, charger or kithox EAN No. 4002395133222

14,4 V COMPACT HAMMERDRILL/DRIVER



BSB 14C Li

Features

- 3 mode selector
- Powerful new frameless motor delivering 50 Nm maximum torque
- 2 speeds 0-400/0-1500 rpm
- FIXTEC 13 mm keyless chuck
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specification

No. of batteries	2 x 2,0 Ah
Charger	30 min*
Weight with battery	1,8 kg
Drilling wood/metal/masonry	45/13/14 mm

1,5-13 mm
50 Nm
0-400/0-1500 грт
14,4 V

Standard Equipment – 2 x batteries, charger and kitbox





















Cat No. BSB 14C Li-202C Article No. 4935 4439 74 Version. 2 x 2,0 Ah Li-Ion batteries, 30 min* charger EAN No. 4002395136025

14,4 V HAMMERDRILL/DRIVER

BSB 14 G2 Li

ALSO AVAILABLE: NiCd Version

Features

- Compact & powerful for completion of all jobsite applications
- 36 Nm maximum torque delivers complete power (32 Nm NiCd)
- 2 speeds 0-400/0-1500 rpm (0-1400 rpm NiCd)
- 24-stage torque adjustment
- \bullet FIXTEC 13 mm single sleeve chuck with full metal jaws (10 mm NiCd)
- 3 mode selector ease of use between functions
- LED for work place illumination (lithium version only)
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool**

Specification

No. of batteries	2 x 1,5 Ah
Charger	60 min*
Weight with battery	1,8 kg
Drilling metal/wood/masoury	13/32/8 mm

Chuck	1,5-13 mm
Max torque	36 Nm
No load speed	0-400/0-1500 грт
Voltage	14,4 V

Standard Equipment - 2 x batteries, charger and kitbox





















Cat No. BSB 14 G2 Li-152C Article No. 4935 4319 90 Version. 2 x 1,5 Ah Li-lon batteries, 60 min* charger EAN No. 4002395132997 Cat No. BSB 14 G2 NC-142C Article No. 4935 4319 89 Version. 2 x 1,4 Ah NiCd batteries, 60 min* charger EAN No. 4002395195107

* Charge times based on 1,5 Ah Li-Ion battery ** Lithium-Ion products only

14,4 V COMPACT DRILL/DRIVER



BS 14C Li

Features

- Ultra compact drill/driver measuring 186 mm in length
- Powerful new frameless motor delivering 50 Nm maximum torque
- 2 speeds 0-400/0-1500 rpm
- FIXTEC 13 mm keyless chuck
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool



Specification

No. of batteries	2 x 2,0 Ah
Charger	30 min*
Weight with battery	1 <i>,</i> 7 kg
Drilling metal/wood	13/45 mm

Chuck 1,5-13 mm 50 Nm Max torque No load speed 0-400/0-1500 rpm 14,4 V

Standard Equipment - 2 x batteries, charger and kitbox

















Cat No. BS 14C Li-202C Article No. 4935 4439 71 Version. 2 x 2,0 Ah Li-Ion batteries, 30 min* charger EAN No. 4002395135653

14,4 V DRILL/DRIVER

BS 14 G2 Li

Features

- Compact & powerful for completion of all jobsite applications
- 36 Nm maximum torque delivers complete power (32 Nm NiCd)
- 2-speeds 0-400/0-1500 rpm (0-1400 rpm NiCd)
- 24-stage torque adjustment for complete control
- $\bullet\,$ FIXTEC 13 mm single sleeve chuck with full metal jaws (10 mm NiCd)
- Built in fuel gauge
- LED for work place illumination (lithium version only)
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool**





Specification

No. of batteries	2 x 1,5 Ah
Charger	60 min*
Weight with battery	1 <i>,7</i> kg
Drilling metal/wood	13/32 mm

Chuck	1,5-13 mm
Max torque	36 Nm
No load speed	0-400/0-1500 грт
Voltage	14,4 V

Standard Equipment - 2 x batteries, charger and kitbox






















12 V HAMMERDRILL/DRIVER

BSB 12 G2 Li

ALSO AVAILABLE: NiCd Version

Features

- Compact & powerful for completion of all jobsite applications
- 30 Nm maximum torque delivers complete power
- 2 speeds 0-350/0-1350 rpm
- 24-stage torque adjustment
- FIXTEC 10 mm single sleeve chuck with full metal jaws
- 3 mode selector ease of use between functions
- $\bullet\,$ New 12 V 1,5 Ah pro lithium pack delivering higher power and higher runtime
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specification

No. of batteries	2 x 1,5 Ah
Charger	60 min*
Weight with battery	1,5 kg
Drilling metal/wood/masonry	10/30/6 mm

1,5-10 mm
30 Nm
0-350/0-1350 грт
12 V

Standard Equipment – 2 x batteries, charger and kitbox

Cat No. BSB 12 G2 NC-142C Article No. 4935 4319 86 Version. 2 x 1,4 Ah NiCd batteries, 60 min* charger EAN No. 4002395195053 Cat No. BSB 12 G2 Li-152C Article No. 4935 4466 90 Version. 2 x 1,5 Ah Li-lon batteries, 60 min* charger EAN No. 4002395136360





















12 V DRILL/DRIVER

BS 12 G2 Li

ALSO AVAILABLE: NiCd Version

Features

- Compact & powerful for completion of all jobsite applications
- 30 Nm maximum torque delivers complete power
- 2-speeds 0-350/0-1350 rpm
- 24-stage torque adjustment for complete control
- FIXTEC 10 mm single sleeve chuck with full metal jaws
- New 12 V 1,5 Ah pro lithium pack delivering higher power and higher runtime
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specification

No. of batteries	2 x 1,5 Ah
Charger	60 min*
Weight with battery	1,4 kg
Drilling metal/wood	10/30 mm

Chuck	1,5-10 mm
Max torque	30 Nm
No load speed	0-350/0-1350 rpm
Voltage	12 V

Standard Equipment - 2 x batteries, charger and kitbox



30




















12 V SUB COMPACT DRILL DRIVER

BBS 12C2 Li KIT

ALSO AVAILABLE: Version with chuck only

Features


- Removable chuck system allows user to keep a 25 mm screwdriving bit in the reception when the chuck is installed
- Extremely compact percussion drill 192 mm length with the chuck /155 mm without
- LED light with twilight mode allows to work in tight and confine spaces
- Belt clip for easy carriage
- Built in fuel gauge
- 2 speed 0-400/0-1500 rpm
- High torque 32 Nm for a wide range of applications
- Offset and right angle attachments delivering the same performance as the tool itself, no more need to cope with torque level or drilling speed
- Full metal planetary gears and gear housing for maximum durability



No. of batteries	2 x 2,0 Ah
Charger	30 min*
Weight with battery	1,2 kg
Drilling metal/wood	10/20 mm
Chuck	1,5-10 mm
Max torque	32 Nm
No load speed	0-400/0-1500 rpm
Voltage	12 V



Standard Equipment – 2 x batteries, charger, double ended bit, belt clip, removable chuck, chuck offset attachment, right angle attachment and kitbox



Cat No. BBS12C2 Li-202B Article No. 4935 4466 93 Version. 2 x 2.0 Ah Li-lon batteries. 30 min* charaer. chuck only EAN No. 4002395136377

Cat No. BBS12C2-OA Article No. 4932 4302 21 Version. offset attachment EAN No. 4002395378821

Cat No. BBS12C2-RAA Article No. 4932 4302 22 Version. right angle attachment EAN No. 4002395378838







COMPATIBLE & VERSATILE

- Possible to fix the chuck on the right angle attachment in order to have a right angle drill
- Ideal for all application in series that required pre-drilling
- 25 mm screw driving bit can be let in the reception when the attachment is installed
- Once the hole drilled, then just pull the chuck out to drive your screw. No more need of 2 drills!

















12 V 2-SPEED ULTRA COMPACT PERCUSSION DRILL



······ 192 mm ······· ▶

BSB 12C2 Li

Features

- Compact hammer drill/driver measuring only 192 mm
- Built in fuel gauge
- Belt clip
- 2-speed gearbox for a wide range of applications
- Industrial metal gearbox and gears for superior durability
- FIXTEC spindle lock and keyless 10 mm chuck
- Electronic switch with variable speed
- 3 mode selector ease of use between applications
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool
- Powerful torque of 32 Nm (2,0 Ah)/40 Nm (4,0 Ah) for all driving applications

Specification

No. of batteries	2 x 2,0 Ah
Charger	30 min*
Weight with battery	1,2 kg
Drilling	
metal/wood/masonry	10/20/10 mm

Percussion rate	22.500 bpm
Chuck	1,5-10 mm
Max torque	32 Nm
No load speed	0-400/0-1500 rpm
Voltage	12 V

Standard Equipment - 2 x batteries, charger and bag













'⊶······ 168 mm ·········







ALSO AVAILABLE: 4,0 Ah Li-loп version

Cat No. BSB 12C2 Li-202B Article No. 4935 4439 64 Version. 2 x 2,0 Ah Li-Ion batteries, 30 min* charger EAN No. 4002395135622

12 V 2-SPEED ULTRA COMPACT DRILL/DRIVER

BS 12C2 Li

Features

- Compact pocket drill/screwdriver measuring only 168 mm
- 17-stage torque adjustment plus additional drilling stage
- 2-speed gearbox for a wide range of applications
- Industrial metal gearbox and gears for superior durability
- FIXTEC spindle lock and keyless 10 mm chuck
- Electronic switch with variable speed
- Built in LED light illuminates the work surface
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specification

No. of batteries	2 x 2,0 Ah
Charger	30 min*
Weight with battery	1,1 kg
Drilling steel/soft wood	10/20 mm
Chuck	1 5-10 mm

Max torque	34 Nm
No load speed	0-350/0-1500 грт
Voltage	12 V

Standard Equipment - 2 x batteries, charger and kitbox
























12 V ULTRA COMPACT DRILL/DRIVER

BS 12C Li

Features

- Compact pocket drill/screwdriver measuring only 161 mm
- Built in fuel gauge
- 17-stage torque adjustment plus additional drilling stage
- Industrial metal gearbox and gears for superior durability
- FIXTEC spindle lock and keyless 10 mm chuck
- Electronic switch with variable speed
- Built in LED light illuminates the work surfaces
- Overload protection
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specification

No. of batteries	2 x 1,5 Ah
Charger	30 min*
Weight with battery	1,0 kg
Drilling steel/soft wood	10/20 mm

Chuck	1,5-10 mm
Max torque	18,5 Nm
No load speed	0–575 грт
Voltage	12 V

Standard Equipment - 2 x batteries, charger and bag









◄·····▶







Cat No. BS 12C Li-152B Article No. 4935 4339 02 Version. 2 x 1,5 Ah Li-lon batteries, 30 min* charger EAN No. 4002395126354

12 V ULTRA COMPACT IMPACT DRIVER

Features

- Ultra compact impact driver measuring only 163 mm
- 115 Nm torque
- Industrial metal gearbox and gears for superior durability
- Built in fuel gauge
- 1/4" Hex bit reception
- Ergonomic soft-grip design
- New 3 beam LED for total workplace illumination
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

Specification

No. of batteries	2 x 2,0 Ah
Charger	30 min*
Weight with battery	1,0 kg
Max torque	115 Nm

No load speed	0–2000 грт
Impact rate	0–3000 ірт
Tool reception	1⁄4″ Hex
Voltage	12 V

Standard Equipment – 2 x batteries, charger and kitbox





























BSS 12C Li



ALSO AVAILABLE:

0-version

12 V CORDLESS HAMMER

BBH 12 Li

ALSO AVAILABLE: 2,0 Ah version

Features

- · L-shape SDS hammer for drilling and fixing into concrete up to 13 mm
- 0,9 Joule impact energy delivers high performance
- Hammer action stop for rotary drilling in wood and metal
- Built in fuel gauge
- Metal gearbox for extended durability
- Safety clutch for user protection
- Features AEG Pro Lithium-Ion battery technology with overload protection for maximum durability of battery and tool

ALSO AVAILABLE: 0-version



Specification

No. of batteries	2 x 4,0 Ah
Charger	30 min*
Weight with battery	1,8 kg
Drilling metal/wood/concrete	8/10/13 mm
Impact energy	0,9 J EPTA
No load speed	0-800 rpm
Blows per minute	0-5350 bpm
Voltage	12 V



Cat No. BBH 12 Li-402C Article No. 4935 4439 91 Version. 2 x 4,0 Ah Li-lon batteries, 30 min² charger EAN No. 4002395135721 Cat No. BBH 12 Li-401C Article No. 4935 4439 88 Version. 1 x 4,0 Ah Li-lon batteries, 30 min² charger EAN No. 4002395135714 Cat No. BBH 12-0 Article No. 4935 4466 99 Version. Zero version – no batteries, charger or kitbox EAN No. 4002395136391









10 Lithium ion







3,6 V INLINE SCREWDRIVER

SE 3.6 Li

ALSO AVAILABLE: NiCd version

Features

- In-line or angled handle adjustment
- 10-stage torque selection plus drill stage
- Ergonomic, modern design
- 2-speed full metal gearbox
- ¼" Hex bit reception



Specification

No. of batteries	2 x 1,5 Ah
Charger	30 тіп*
Weight with battery	0,6 kg
Length with battery	28 ст

Drilling aluminium/wood	5/6 mm
Max torque	6,5 Nm
No load speed	200/600 грт
Voltage	3,6 V

Standard Equipment – 2×1.5 Ah batteries, charger and kitbox














Cat No. SE 3.6 Li-152C Article No. 4935 4131 65 Version. 2 x 1,5 Ah Li-lon batteries, 30 min* charger EAN No. 4002395197538 Cat No. SE 3.6 NC-142C Article No. 4935 4131 55 Version. 2 x 1,4 Ah NiCd batteries, 30 min* charger EAN No. 4002395197514

FLASHLIGHTS/BATTERY LAMPS

	Model	Voltage	Article Number 4932-	EAN Number 4002395-
ar.	BLL 12C	12 V	3521 62	368150
	FL 12	12 V	3521 00	367535
	FL 14	14 V	3521 01	367542
	BAL 18	18 V	3526 61	373192

Pro Lithium-Ion technology

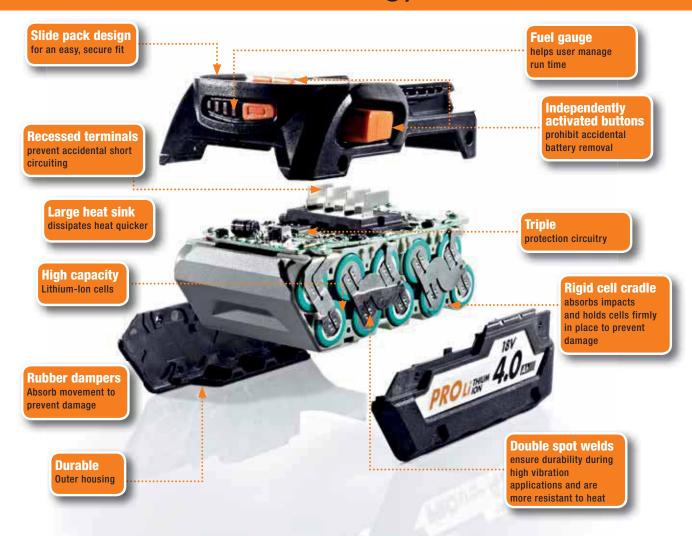

TRIPLE PROTECTION



AEG POWERTOOLS Lithium-Ion technology provides the optimum power platform for todays professional user by protecting both battery and machine in 3 ways:

1) Electronic current protection

- shuts down if excessive current draw may harm battery and machine
- thermal shutdown protects battery if temperature gets too high
- protects individual cells from over discharging

2) Robust construction

 AEG POWERTOOLS Lithium-lon technology benefits from robust internal and external design features as illustrated above, to ensure optimum durability

3) Individual cell monitoring

 individual cells charge and discharge at different rates – AEG POWERTOOLS Lithium-Ion technology offers tailored charging and discharging for individual cells for maximum cell life

Batteries and Chargers

AEG BATTERY PACKS

Long-life, high capacity packs without any memory effect. The excellent contact system with perfectly protected self cleaning contacts offers the lowest possible resistance between battery and tool for optimum performance.

BATTERIES

DAI	IEKIES						
		Catalogue Number	Chemistry	Capacity Ah	Charger Compatibility / Charge Time*	Article Number	EAN Number
		L1840R	Li-lon	4,0		4932 4301 70	4002395378319
	1	L1830R	Li-lon	3,0		4932 3526 55	4002395373130
>		L1820R	Li-lon	2,0	AL 9618 / 60 min*	4932 4301 69	4002395378302
8		L1815R	Li-lon	1,5	BL 1218 / 30 min*	4932 3526 54	4002395373123
		B1817G	NiCd	1,7		4932 3524 80	4002395371396
		B1814G	NiCd	1,4		4932 3525 33	4002395371914
		L1430R	Li-lon	3,0		4932 3526 57	4002395373154
14,4 V		L1420R	Li-lon	2,0	AL 9618 / 60 min* BL 1218 / 30 min*	4932 4301 67	4002395378289
14,		L1415R	Li-lon	1,5	AL1218G / 60 min*	4932 3526 56	4002395373147
		B1414G	NiCd	1,4		4932 35 2531	4002395371891
	♣	L1240	Li-lon	4,0	LL 1230 / 30 min*	4932 4301 66	4002395378272
	4	L1230	Li-lon	3,0		4932 3528 24	4002395374823
>		L1220	Li-lon	2,0		4932 4301 65	4002395378265
12 \	3	L1215	Li-lon	1,5		4932 3526 58	4002395373161
		L1215R	Li-lon	1,5	AL 9618 / 60 min* BL 1218 / 30 min*	4932 4303 65	4002395380268
		M1230R	NiMH	3,0		4932 3521 07	4002395367603
		B1214G	NiCd	1,4		4932 3525 32	4002395371907
> V	~	SL 3,6	Li-lon	1,5	LA 036 / 30 min*	4932 3529 69	4002395376278
3,6		SB 3,6	NiCd	1,4		4932 3520 98	4002395367511

CHARGERS

	Catalogue Number	Chemistry	Charger Compatibility / Charge Time*	Article Number	EAN Number
	AL1214G	NiCd, NiMH, Li-Ion 12–14,4 V	/0 **	4932 3524 81	4002395371402
	AL1218G	NiCd, NiMH, Li-lon 12–18 V	60 min*	4932 3529 57	4002395376155
	BL 1218	NiCd, NiMH, Li-lon 12–18 V		4932 3526 59	4002395373178
	LL 1230	Li-loп 12 V	30 min*	4932 3520 96	4002395367498
6	LA 036	NiCd, NiMH, Li-lon 3,6 V		4932 3520 97	4002395367504

^{*} Charge times based on 1,5 Ah Li-ion battery



REAL HAMMER POWER

AEG POWERTOOLS offer an extensive selection of high performance rotary, combination, chipping and demolition hammers.

THE HAMMER RANGE

SDS-PLUS ROTARY HAMMERS

SDS-PLUS COMBI HAMMERS

SDS-PLUS CHIPPING HAMMER

SDS-MAX COMBI HAMMERS

SDS-MAX CHIPPING HAMMERS

SDS-MAX LARGE COMBI HAMMERS

SDS-MAX LARGE DEMOLITION HAMMERS







SDS-PLUS ROTARY HAMMER

BH 22 E

Features

- Powerful 650 watt motor
- 22 mm drilling capacity in concrete
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism

Specification

Power input	650 watt
No load speed	0-1290 rpm
Impact energy	1,9 J EPTA
Hammer rate (full load)	0-3700 bpm
Drilling concrete/steel/wood	22/13/30 mm
Weight	2,5 kg



Standard Equipment - Side handle, metal depth gauge, 4 m cable and kitbox















Cat No. BH 22 E Article No. 4935 4114 80 Version, 220-240 V EAN No. 4002395197026

SDS-PLUS ROTARY HAMMER

BH 24 E

Features

- Powerful 720 watt motor
- 24 mm drilling capacity in concrete
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism
- Soft-grip handle for comfort

Specification

720 watt
1500 грт
2,3 J EPTA
0–4500 bpm
24/13/30 mm
2,4 kg



Standard Equipment - Side handle, metal depth gauge, 4 m cable and kitbox

Cat No. BH 24 E Article No. 4935 4282 00 Version. 240 V EAN No. 4002395194384

















KH 24 XE

ALSO AVAILABLE: KH 24 E - no FIXTEC

SDS-PLUS COMBI HAMMER

Features

- Powerful 720 watt motor
- 24 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- FIXTEC quick change chuck
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism
- Soft-grip handle for comfort

Specification

Power input	720 wat
No load speed	1500 грп
Impact energy	2,3 J EPTA
Hammer rate (full load)	0–4500 bpп
Drilling concrete/steel/wood	24/13/30 mm
Weight	2,6 kg





















Standard Equipment - Side handle, FIXTEC adaptor and keyless chuck, metal depth gauge, 4 m cable and kitbox



720









SDS-PLUS COMBI HAMMER

KH 26 E

ALSO AVAILABLE: KH 26 XE - with FIXTEC

Features

- Powerful 800 watt motor
- 26 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Forward and reverse mechanism
- Soft-grip handle for comfort

Specification

Power input	800 watt
No load speed	1500 грт
Impact energy	2,5 J EPTA
Hammer rate (full load)	0-4500 bpm

26/13/30 mm
2,6 kg

Standard Equipment – Side handle, metal depth gauge, 4 m cable and kitbox

Cat No. KH 26 E Article No. 4935 4281 80 Version. 220-240 V EAN No. 4002395194360 Cat No. KH 26 XE Article No. 4935 4289 10 Version. 220-240 V EAN No. 4002395194681 with FIXTEC adaptor



















SDS-PLUS COMBI HAMMER

BH 26 LXE

ALSO AVAILABLE: BH 26 LE - no FIXTEC

Features

- Powerful 750 watt motor
- 26 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for drilling/chiselling in sensitive materials
- FIXTEC quick change tool system
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Hammer action stop for drilling in wood or metal

Specification

Power input	750 watt
No load speed	0–1400 грт
Impact energy	2 <i>,7</i> J EPTA
Hammer rate (full load)	0–4500 bpm

Drilling	
concrete/steel/wood	26/13/30 mm
Drilling capacity core cutter	68 mm
Weight	3,1 kg

Standard Equipment - Side handle, FIXTEC adaptor and keyless chuck, metal depth gauge, 4 m cable and kitbox

















AEG







Cat No. BH 26 LXE Article No. 4935 4120 00 Version. 220–240 V EAN No. 4002395197187 Cat No. BH 26 LE Article No. 4935 4120 42 Version. 220-240 V EAN No. 4002395197903

SDS-PLUS COMBI HAMMER

KH 28 Super XE

Features

- Powerful 1010 watt motor
- 28 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for drilling/chiselling in sensitive materials
- FIXTEC quick change tool system
- Safety clutch for user protection
- Variable speed electronics for control
- Hammer action stop for drilling in wood or metal
- Soft-grip handle for comfort
- Electronic overload protection
- No load speed limitation



Specification

Power input	1010 watt
No load speed	1500 rpm
Impact energy	2,8 J EPTA
Hammer rate (full load)	0-5000 bpm
Drilling concrete/steel/wood	28/13/30 mm
Weight	2,8 kg

Standard Equipment - Side handle, FIXTEC adaptor and keyless chuck, metal depth gauge, 4 m cable and kitbox

























SDS-PLUS COMBI HAMMER

PN 3500 X

ALSO AVAILABLE: PN 3500 - no FIXTEC

Features

- Powerful 750 watt motor
- 30 mm drilling capacity in concrete
- Rotary stop for light chiselling applications
- Soft hammer mode reduces blow energy and speed for control in chiselling applications
- FIXTEC quick change tool system
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Hammer action stop for drilling in wood or metal

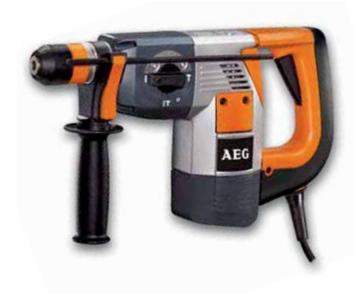

Specification

Power input	750 watt
No load speed	0–970 грт
Impact energy	3,4 J EPTA
Hammer rate (full load)	0–4200 bpm

Drilling	
concrete/steel/wood	30/16/40 mm
Drilling capacity core cutter	82 mm
Weight	3,6 kg

Standard Equipment – Side handle, FIXTEC adaptor and keyed chuck, metal depth gauge, 4 m cable and kitbox























Cat No. PN 3500 X Article No. 4935 4122 10 Version. 220-240 V EAN No. 4002395198337 Cat No. PN 3500 Article No. 4935 4121 52 Version. 220-240 V EAN No. 4002395198306

SDS-PLUS CHIPPING HAMMER

PM 3

Features

- Powerful 720 watt motor
- 3,6 J impact energy for powerful chipping
- Variolock (35 positions) for selecting the most appropriate chisel angle
- Service hatches for easy changing of carbon brushes
- Lock-on switch function
- AVS anti-vibration aystem significantly reduces vibration for more comfortable operation
- Soft-grip for more comfortable handling



Specification

Power input	720 watt	Hammer rate (full load)	0-3650 bpm
Impact energy	3,6 J EPTA	Weight	3,7 kg

Standard Equipment – Side handle, 4 m cable and kitbox





AEG 3 YEARS JAHRE















SDS-MAX COMBI HAMMER

KH 5 E

Features

- Powerful 1200 watt motor
- 40 mm drilling capacity in concrete
- Rotary stop for chiselling applications
- Soft hammer mode reduces blow energy and speed for drilling/ chiselling in sensitive materials
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Soft start for precise start of drilling/chiselling
- Service light provides in-time notice in the case of worn out brushes
- Power light indicates if electricity flows

Standard Equipment - Side handle, metal depth gauge, grease, 6 m cable and kitbox

Specification

Power input	1200 watt
No load speed	300 грт
Impact energy	8,5 J EPTA
Hammer rate (full load)	0-2840 bpm
Drilling concrete/	
core bit/tunnel drill bit	40/90/65 mm
Drilling capacity core cutter	105 mm
Weight	6,6 kg





















Cat No. KH 5 F Article No. 4935 4123 26 Version, 220-240 V EAN No. 4002395198603

SDS-MAX COMBI HAMMER

KH 5 G

Features

- Powerful 1100 watt motor
- 40 mm drilling capacity in concrete
- Rotary stop for chiselling applications
- Safety clutch for user protection
- Soft start for precise start of drilling/chiselling
- Power light indicates if electricity flows

Specification

Power input	1100 watt
No load speed	450 rpm
Impact energy	7,5 J EPTA
Hammer rate (full load)	0–3000 bpm
Drilling concrete/	
core bit/tunnel drill bit	40/105/65 mm
Drilling capacity core cutter	105 mm
Weight	6,0 kg



Standard Equipment - Side handle, metal depth gauge, grease, 4 m cable and kitbox

















MH 5 E



Cat No. KH 5 G Article No. 4935 4181 60 Version. 220-240 V EAN No. 4002395133062

SDS-MAX CHIPPING HAMMER

Features

- Powerful 1200 watt motor
- 8,5 J impact energy for effortless chipping
- Soft hammer mode reduces blow energy for chiselling in sensitive materials
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Soft start for precise start of chiselling
- Service light provides in-time notice in the case of worn out brushes
- Power light indicates if electricity flows

Standard Equipment - D front handle, grease, 6 m cable and kitbox

Specification

Power input	1200 wat
Impact energy	8,5 J EPTA
Hammer rate (full load)	0-2840 bpm
Weight	6,2 kg





























SDS-MAX TRADESMAN CHIPPING HAMMER

MH 5 G

Features

- Best power to weight ratio in its class
- 2 mode SDS-Max chipping hammer
- Mulit position chisel function gives 12 different positions to optimize working angle
- · Robust magnesium gear housing for tough environments, exact seat fitting of gear components for better cooling
- Low vibration construction enhances usage time per day
- Soft grip side handle

Specification

1100 watt
7,5 J EPTA
0–3000 bpm
16 m/s²
5,9 kg



NEW

















₽∪

Cat No. MH 5 G Article No. 4935 4431 70 Version, 220-240 V EAN No. 4002395135462

Standard Equipment - Side handle, 4 m cable and kitbox

SDS-MAX LARGE COMBI HAMMER

PN 11 E

Features

- Powerful 1700 watt motor
- 20 J impact energy for heavy demolition applications
- 50 mm drilling capacity into concrete
- Variable speed electronics for control
- No load speed limitation
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Safety clutch for user protection
- Soft start for precise start of drilling/chiselling
- Service light provides in-time notice in the case of worn out brushes
- Automatic cut out carbon brushes
- Soft-grip on handles for comfort

Standard Equipment - D front handle, additional side handle, grease, 6 m cable and kitbox

Cat No. PN 11 E Article No. 4935 4124 40 Version. 220-240 V EAN No. 4002395198931

Specification

Power input	1700 watt
Impact energy	20 J EPTA
Hammer rate (full load)	975-1950 bpm
Drilling concrete/	
core bit/tunnel drill bit	50/150/80 mm
Weight	11,8 kg







1700

20











SDS-MAX LARGE DEMOLITION HAMMER

PM 10 E

Features

- Powerful 1600 watt motor
- 20 J impact energy for heavy demolition applications
- Variable speed electronics for control
- No load speed limitation
- AVS anti-vibration system significantly reduces vibration for user comfort and safety
- Soft start for precise start of drilling/chiselling
- Service light provides in-time notice in the case of worn out brushes
- Automatic cut out carbon brushes
- Soft-grip on handles for comfort

Standard Equipment - D front handle, grease, 6 m cable and kitbox

Specification

Power input	1600 watt
Impact energy	20 J EPTA
Hammer rate (full load)	975-1950 bpm
Weight	11,0 kg







AEG 3 ANNÉES YEARS
















POWER TO PROTECT

AEG POWERTOOLS is committed to producing hard hitting, low vibration hammers which allow professional users to carry out heavy duty job site applications safely.

A new directive in 2005 – The EU Physical Agents (Vibration) Directive 2002/44/EC states that Hand Arm Vibration (HAV) should be considered an official risk to health and safety in the workplace. These vibrations are expressed in terms of acceleration – m/s^2 . All AEG POWERTOOLS hammers are rated by their tri-axle vibration levels as required by this directive, as shown in the table below, so professional users can work safely in line with this directive.

ROTARY/COMBINATION HAMMERS							
Model		Power input	Impact energy	Hammer rate	Tri-axle vibration level drilling	Tri-axle vibration level chiselling	Weight
BBH 12 Li		12 V	0,9 J	0-5350 bpm	4,4 m/s ²	п/а	1,8 kg
BBH 18 Li	7	18 V	2,3 J	0-4200 bpm	16,0 m/s²	8,8 m/s ²	3,5 kg
BH 22 E	79	650 W	1,9 J	0-3700 Ьрт	15,5 m/s ²	п/а	2,5 kg
BH 24 E		720 W	2,3 J	0-4500 bpm	14,0 m/s ²	п/а	2,4 kg
KH 24 XE		720 W	2,3 J	0-4500 bpm	14,0 m/s ²	11,6 m/s ²	2,6 kg
KH 26 E		800 W	2,5 J	0-4500 bpm	15,0 m/s²	12,4 m/s ²	2,6 kg
BH 26 LXE	7	750 W	2,7 J	0-4500 bpm	14,5 m/s²	13,0 m/s²	3,1 kg
KH 28 Super XE		1010 W	2,8 J	0-5000 Ьрт	15,4 m/s ²	13,5 m/s²	2,8 kg
PN 3500 X	P	750 W	3,4 J	0-4200 bpm	20,0 m/s ²	13,5 m/s²	3,6 kg
KH 5 G	THE	1100 W	<i>7</i> ,5 J	0-3000 Ьрт	16,8 m/s²	16,7 m/s²	6,3 kg
KH 5 E	70	1200 W	8,5 J	0-2840 Ьрт	13,0 m/s²	9,0 m/s²	6,6 kg
PN 11 E	a Di	1700 W	20 J	975-1950 bpm	12,5 m/s²	11,0 m/s²	11,8 kg


DEMOLITION HAMMERS

Model		Power input	Impact eпergy	Hammer rate	Tri-axle vibration level drilling	Tri-axle vibration level chiselling	Weight
PM 3		720 W	3,6 J	0-3650 bpm	п/а	15,5 m/s ²	3,7 kg
MH 5 G	10	1100 W	7,5 J	0-3000 Ьрт	п/а	16,0 m/s ²	5,9 kg
MH 5 E		1200 W	8,5 J	0-2840 Ьрт	п/а	11,5 m/s²	6,2 kg
PM 10 E	7	1600 W	20 J	975-1950 Ьрт	п/а	11,0 m/s ²	11,0 kg

POWER TO DRILL DEEPER

AEG POWERTOOLS offer the power to drill deeper with their powerful range of percussion drills offering enhanced performance, reliability and durability for todays professional user.

DRILLING SYSTEM RANGE

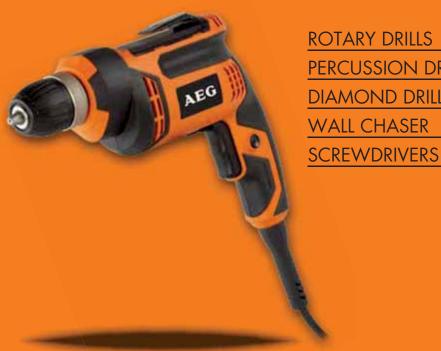

PERCUSSION DRILLS
DIAMOND DRILL
WALL CHASER





ROTARY DRILL

BE 650 R

Features

- Compact and powerful 650 watt motor
- Compact ergonomic design offers excellent handling
- Variable speed control with forward and reverse mechanism
- 10 mm keyless metal chuck
- 43 mm gear neck for use in drill stands
- Speed control with speed dial

Specification

Power input	650 watt
No load speed	0-3000 грт
Drilling steel/aluminium/wood	10/13/30 mm
Max torque	25 Nm
Chuck	1,0-10 mm
Weight	1,7 kg



Standard Equipment - Chuck, cable













Cat No. BE 650 R Article No. 4935 3817 75 Version. 220-240 V EAN No. 4002395194599

ROTARY DRILL

BE 705 R

Features

- Extremely compact design
- Compact and powerful 705 watt motor
- Variable speed control with forward and reverse mechanism
- Belt clip
- 10 mm keyless chuck

Specification

Power input	705 watt
No load speed	0-2700 rpm
Drilling steel/aluminium/wood	10/16/30 mm
Max torque	15 Nm
Chuck	1,0-10 mm
Weight	1,6 kg



Standard Equipment – Chuck, 4 m cable and softbag





AEG 3 YEARS













Cat No. BE 705 R Article No. 4935 4165 05 Version. 220-240 V EAN No. 4002395129744

ROTARY DRILL B4-1050 ST

Features

- Four-speed rotary drill for drilling up to 32 mm
- Breast plate and 57 mm gear neck for use in magnetic drill stands
- Standard morse taper 3 reception
- Attachable handle with adjustable length

Specification

Power input	1050 watt
No load speed 1st/2nd/3rd/4th gear	220/260/350/ 420 rpm
Drilling steel/aluminium/wood	32/52/64 mm
Max torque	> 200 Nm
Tool reception	Morse taper 3
Weight	9,7 kg

Standard Equipment - Breast plate, attachable handle,





AEG 3 YEARS JAHRE









PERCUSSION DRILL

SBE 500 R

Features

- Compact and powerful 500 watt motor
- Compact ergonomic design offers excellent handling
- Variable speed control with forward and reverse mechanism
- · Hammer action stop for rotary drilling
- 10 mm metal keyed chuck
- 43 mm gear neck for use in drill stands

Specification

500 watt
0-2650 rpm
13/10/20 mm
21 Nm
1,5-10 mm
1,6 kg



Standard Equipment - Chuck, cable













Cat No. SBE 500 R Article No. 4935 4126 37 Version, 220-240 V EAN No. 4002395199242

PERCUSSION DRILL

SBE 570 R

Features

- Compact and powerful 570 watt motor
- Compact ergonomic design offers excellent handling
- Variable speed control with forward and reverse mechanism
- Hammer action stop for rotary drilling
- 13 mm metal keyed chuck
- 43 mm gear neck for use in drill stands

Specification

Power input	570 watt
No load speed	0-2700 rpm
Drilling concrete/steel/wood	15/13/30 mm
Max torque	23 Nm
Chuck	1,5-13 mm
Weight	1,7 kg



Standard Equipment - Chuck, side handle, metal depth gauge and cable













Cat No. SBE 570 R Article No. 4935 4126 81 Version. 220-240 V EAN No. 4002395199303

PERCUSSION DRILL

SBE 600 R

ALSO AVAILABLE: Kit version

Features

- Compact and powerful 600 watt motor
- Compact ergonomic design with large soft-grip areas offers excellent handling
- Variable speed control with forward and reverse mechanism
- Hammer action stop for rotary drilling
- 13 mm metal keyless chuck
- 43 mm gear neck for use in drill stands
- Speed control with speed dial

Specification

Power input	600 watt	
No load speed	0-2700 rpm	
Drilling concrete/steel/wood	15/13/30 mm	
Max torque	23 Nm	
Chuck	1,5-13 mm	
Weight	1,8 kg	
9	-,-	













Standard Equipment - Chuck, side handle, depth gauge and cable



PERCUSSION DRILL

SBE 650 R

ALSO AVAILABLE: Kit version

Features

- Compact and powerful 650 watt motor
- Compact ergonomic design with large soft-grip areas offers excellent handling
- Variable speed control with forward and reverse mechanism
- Hammer action stop for rotary drilling
- 13 mm metal keyless chuck
- 43 mm gear neck for use in drill stands
- Speed control with speed dial

Standard Equipment - Chuck, side handle, depth gauge,

Specification

650 watt
0-3000 грт
16/13/30 mm
25 Nm
1,5-13 mm
1,8 kg















Cat No. SBE 650 R Article No. 4935 3817 70 Version. 220-240 V EAN No. 4002395194582 Cat No. SBE 650 R Kit Article No. 4935 3817 10 Version. 220-240 V delivered in kitbox EAN No. 4002395194551

PERCUSSION DRILL

SB2-650

Features

- Compact and powerful 650 watt motor
- Compact ergonomic design with large soft-grip areas offers excellent handling
- Variable speed control
- 2-speed selection for increased torque and versatility
- Hammer action stop for rotary drilling
- 13 mm metal keyed chuck
- 43 mm gear neck for use in drill stands

Specification

Power input	650 watt	
No load speed	0-2250/0-3000 грт	
Drilling concrete/steel/wood	16/13/30 mm	
Max torque	25 Nm	
Chuck	1,5-13 mm	
Weight	1,8 kg	



Standard Equipment - Chuck, side handle, depth gauge, cable



AEG 3 ANNÉES YEARS JAHRE











Cat No. SB2-650 Article No. 4935 3817 60 Version. 220-240 V EAN No. 4002395194575

HIGH TORQUE PERCUSSION DRILL

SB2E 750 RX ST

ALSO AVAILABLE: SB2E 750 R ST - no FIXTEC

Features

- Compact and powerful 750 watt high torque percussion drill
- 62 Nm torque delivers complete power
- IMB Integrated-Metal-Block technology for highest durability and stability
- 2-speed gearbox with synchromesh gear lever
- Variable speed control with forward and reverse mechanism
- Easy access to carbon brushes via removal of soft-grip rubber
- Hammer action stop for rotary drilling
- 13 mm metal keyless chuck

Standard Equipment - Side handle, metal depth gauge, 4 m cable and kitbox

Specification

Power input	/50 warr
No load speed	0-1200/0-3400 грт
Drilling concrete/steel/wood	20/13/40 mm
Max torque	62 Nm
Chuck	1,5-13 mm
Weight	2,5 kg







750

W













L-SHAPE PERCUSSION DRILL

ERGOMAX

Features

- Ultra compact powerful 750 watt percussion drill
- Superior ergonomic design
- Removable main handle
- IMB Integrated-Metal-Block technology for highest durability & stability
- Variable speed control with forward and reverse mechanism
- Patented FIXTEC system for quick and easy changing of accessories
- 2-speed planetary synchromesh gear
- Direct bit reception for reduced weight, reduced length, improved
- Hammer action stop for rotary drilling
- 13 mm metal keyless chuck

Standard Equipment - Side handle, metal depth gauge, 4 m cable and kitbox

Specification

Power input	750 watt
No load speed	0-1200/0-3400 rpm
Drilling concrete/steel/wood	20/13/40 mm
Max torque	58 Nm
Chuck	1,5-13 mm
Weight	2,6 kg











750











Cat No. Ergomax Article No. 4935 4123 96 Version. 220-240 V EAN No. 4002395198870

PERCUSSION DRILL

SB 20-2E

Features

- Compact and powerful 750 watt percussion drill
- AVS anti-vibration system for more comfortable use
- Safety clutch for user protection
- 2-speed gearbox for increased torque and versatility

Standard Equipment – Side handle, metal depth gauge,

- Ergonomic soft-grip design for comfort
- Variable speed control with forward and reverse mechanism
- Hammer action stop for rotary drilling
- 13 mm metal keyless chuck

4 m cable and kitbox

Specification

Power input	750 watt
No load speed	0-1000/0-3200 rpm
Drilling concrete/steel/wood	20/13/40 mm
Max torque	56 Nm
Chuck	1,5-13 mm
Weight	2,8 kg







56













SB 22-2E

Cat No. SB 20-2E Article No. 4935 4110 00 Version. 220-240 V EAN No. 4002395196609

Features

• Compact and powerful 1010 watt percussion drill

PERCUSSION DRILL

- AVS anti-vibration system for more comfortable use
- Safety clutch for user protection
- 2-speed gearbox
- Ergonomic soft-grip design for comfort
- Variable speed control with forward and reverse mechanism
- Hammer action stop for rotary drilling
- 13 mm metal keyless chuck

Specification

Power input	1010 watt
No load speed	0-1000/0-3200 rpm
Drilling concrete/steel/wood	22/16/40 mm
Max torque	60 Nm
Chuck	1,5-13 mm
Weight	2,9 kg

ALSO AVAILABLE: with keyed chuck



Standard Equipment - Side handle, metal depth gauge, 4 m cable and kitbox





AEG 3 ANNÉES YEARS JAHRE

















DRY DIAMOND DRILL

DB 1500-2 E

Features

- Powerful 1500 watt motor
- High performance 2-speed dry diamond drill
- Dual protection with interlinked mechanical and electronic clutches for safety
- Robust construction and full metal gearbox for durability
- 2-speed gear box
- Electronics with soft start for precision drilling and motor overload protection
- Soft hammer mode

Specification

Power input	1500 watt
No load speed	0-1500/0-3000 rpm
Spindle thread	M18 x 2,5

Max. drilling capacity	
iп masonry/brick	162 mm
Weight	4,2 kg

Standard Equipment – Kitbox and handle















MFE 1500



Cat No. DB 1500-2 E Article No. 4935 4124 75 Version. 220-240 V EAN No. 4002395198955

WALL CHASER

Features

- Powerful 1500 watt motor
- Electronics with thermal overload protection and soft start
- Variable and adjustable cutting depth for accurate results
- Variable cutting width for versatility
- Bayonet adaptor for dust extraction
- Spindle lock

Specification

Power input	1500 watt
Disc diameter	125 mm
No load speed	975-1950 bpm

Cutting width/depth	8-30/8-26 mm
Weight	4,1 kg
<u> </u>	

Blade for MFE 1500

Туре	Blade Ø mm	Bore Ø mm	Segment height mm	Quantity	Article No. 4932-	EAN No. 4002395-
DSU 125 – Laser welded universal blade especially suitable for wall chasers	125	22,23	10	1	373147	346455

Standard Equipment – Kitbox, 4 m cable, special break out chisel, front handle, suction adaptor, spanner

















SELF DRILLING SCREWDRIVER

S 2500 E

Features

- Powerful 720 watt motor for increased productivity
- · Compact self drilling screwdriver with high torque for self tapping screws
- Full metal gearbox for durability
- Easily adjustable depth-setting nosepiece for consistent fastener depth
- Forward and reverse mechanism
- Ergonomic design and soft-grip for comfortable handling
- 1/4" Hex bit reception
- Belt clip

Standard Equipment – 2 depth gauges, ¾" & 5/16" Hex sockets, bit holder, PH 2 bit, belt clip, 4 m cable

Specification

Power input	720 watt
No load speed	0-2500 rpm
Self-tapping/wood screws	6,3/6 mm
Torque	14 Nm
Bit reception	¼" Hex
Weight	1,5 kg

















Cat No. S 2500 F Article No. 4935 4132 25 Version, 220-240 V EAN No. 4002395197651

DRYWALL SCREWDRIVER

S 4000 E

Features

- Powerful 720 watt motor for increased productivity
- Compact high speed screwdriver for drywall applications
- Full metal gearbox for durability
- Easily adjustable depth-setting nosepiece for consistent fastener depth
- Forward and reverse mechanism
- Ergonomic design and soft-grip for comfortable handling
- ¼" Hex bit reception
- Belt clip

Standard Equipment – Depth gauge, bit holder, PH 2 bit, belt clip, 4 m cable

Specification

Power input	720 watt
No load speed	0–4000 rpm
Drywall screws	5 mm
Torque	10 Nm
Bit reception	¼" Hex
Weight	1,4 kg















Art. No.



FAN No.

Cat No. S 4000 E Article No. 4935 4132 15 Version. 220-240 V EAN No. 4002395197637

SCREWDRIVING POWERSET

Set of 40 screwdriving bits

COLDfire® is a special hardening treatment for making metals stronger, tougher and more durable. This cryogenic process is a one-time permanent treatment affecting the entire screwdriving bit and it is not just a surface coating. The cyrogenic process consists of two steps, firstly the bit is hardened by heating it up to 870° and then freezing the bit down to -148° using a dry nitrogen atmosphere. The result of this process is a bit with exceptional durability.

- + 40% stronger bit tips hold their form and will accept higher torque forces
- + 45% longer life over the lifetime of a bit one can expect to drive 45% more screws





Qty	Description									Art. No. 4932-	EAN No. 4002395-
Scre	wdriving bits	25 m	m length								
1	PH 1	2	PZ 3	1	0,6 x 4,5	1	TX 7	2	TX 20		
2	PH 2	1	Hex 3	1	0,8 x 5,5	1	TX 8	2	TX 25		
1	PH 3	1	Hex 4	1	1,0 x 5,5	1	TX 9	1	TX 30		
2	PZ 1	1	Hex 5	1	1,2 x 6,5	2	TX 10	1	TX 40	352255	369140
2	PZ 2	1	Hex 6	1	TX 6	2	TX 15				
Scre	wdriving bits	50 m	m length								
1	PH 1	1	PZ 1	1	TX 10	1	TX 20	1/4" H	Hex magnetic		
1	PH 2	1	PZ 2	1	TX 15			bit h	older		



POWER TO PERFORM

AEG POWERTOOLS offer an extensive range of grinders in a wide variety of power classes for the most diverse professional applications. These high performance tools are equipped with advanced features to ensure comfort and ease of use in the most challenging environments.

METALWORKING RANGE

SMALL ANGLE GRINDERS

LARGE ANGLE GRINDERS

DIE GRINDERS

POLISHER

SANDER

ABRASIVE METAL CHOPSAW







WS 6-115

Features

- Compact powerful 720 watt motor
- Metal gearbox for durability
- Directed air exhaust
- Gear head rotates at 90° intervals for added versatility
- Flat metal gear head for excellent visibility of work piece and optimised cutting depth
- Protected air inlets
- Spindle lock

Standard Equipment - Additional handle, flange, flange nut, spanner and cable

Specification

720 watt
10.000 грт
28 mm
115 mm
M14
1,9 kg











Cat No. WS 6-115 Article No. 4935 4132 50 Version. 220-240 V EAN No. 4002395197699

SMALL ANGLE GRINDER

WS 6-125

Features

- Compact powerful 720 watt motor
- Metal gearbox for durability

flange nut, spanner and cable

- Directed air exhaust
- Gear head rotates at 90° intervals for added versatility
- Flat metal gear head for excellent visibility of work piece and optimised cutting depth

Standard Equipment - Additional handle, flange,

- Protected air inlets
- Spindle lock

Specification

Power input	720 watt
No load speed	10.000 грт
Cutting depth	33 mm
Grinding disc Ø	125 mm
Spindle thread	M14
Weight	1,9 kg













WS 9-115

Features

- Powerful 900 watt motor with outstanding performance
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted areas
- Optimised cooling slots prevent overheating, even when blocking occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Spindle lock



Specification

Power input	900 watt
No load speed	11.000 грт
Cutting depth	33 mm

Grinding disc Ø	115 mm
Spindle thread	M14
Weight	2,0 kg

Standard Equipment – AVS side handle, keyless safety guard, flange, flange nut, spanner and 4 m cable

















Cat No. WS 9-115 Article No. 4935 4193 80 Version. 220-240 V EAN No. 4002395130689

SMALL ANGLE GRINDER

WS 9-125

ALSO AVAILABLE: WS 9-125 Kit - with kitbox

Features

- Powerful 900 watt motor with outstanding performance
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted areas
- Optimised cooling slots prevent overheating, even when blocking occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Spindle lock



Specification

Power input	900 watt
No load speed	11.000 грт
Cutting depth	37 mm

Grinding disc Ø	125 mm
Spindle thread	M14
Weight	2,0 kg

and 4 m cable





AEG 3 YEARS JAHRE











Standard Equipment - AVS side handle, keyless safety guard, flange, flange nut, spanner

WS 11-115

Features

- Powerful 1100 watt motor with outstanding performance
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted
- Optimised cooling slots prevent overheating, even when blocking occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Spindle lock



Specification

Power input	1100 watt
No load speed	11.000 грт
Cutting depth	33 mm

Grinding disc Ø	115 mm
Spindle thread	M14
Weight	2,1 kg

Standard Equipment – AVS side handle, keyless safety guard, flange, flange nut, spanner and 4 m cable

















Cat No. WS 11-115 Article No. 4935 4194 00 Version. 220-240 V EAN No. 4002395130726

SMALL ANGLE GRINDER

WS 11-125

Features

- Powerful 1100 watt motor with outstanding performance
- · Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted
- Optimised cooling slots prevent overheating, even when blocking occasionally by hand
- Most compact girth and length for comfortable use all day long
- Lightweight for best handling
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Spindle lock

ALSO AVAILABLE: WS 11-125 Kit - with kitbox & 2 diamond discs



Specification

Power input	1100 watt
No load speed	11.000 rpm
Cutting depth	37 mm

Grinding disc Ø	125 mm
Spindle thread	M14
Weight	2,1 kg





AEG 3 ANNÉES YEARS JAHRE











Standard Equipment - AVS side handle, keyless safety guard, flange, flange nut, spanner and 4 m cable

WS 12-125 XE

Features

- Powerful 1200 watt motor with outstanding performance
- Variable speed electronics for lower speed setting especially in finishing applications
- Constant speed for best performance and high torque, even in lower speed applications
- Machined metal gears for best durability
- Flat metal gear head for excellent visibility of work piece and work in restricted areas
- Optimised cooling slots prevent overheating, even when blocking occasionally by hand
- Compact length and girth for comfortable use all day long
- AVS side handle for comfort and safety
- Burst resistant keyless safety guard for easy and fast guard adjustment
- Fast and tool-free disc change with patented FIXTEC nut
- Spindle lock

ALSO AVAILABLE: WS 12-125 XE Kit - with kitbox, 3 x flap discs, 1 x flexible backing pad, 10 x fibre discs



Specification

Power input	1200 watt
No load speed	2800-11.000 rpm
Cutting depth	37 mm

Grinding disc Ø	125 mm
Spindle thread	M14
Weight	2,3 kg

Standard Equipment – AVS side handle, keyless safety guard, flange, FIXTEC nut, spanner and 4 m cable


































WSC 14-125 MX

Features

- Powerful 1450 watt motor
- Digitronic with constant speed electronics, soft start, motor overload protection and no load speed limitation
- FIXTEC patented nut for fast and easy disc changing
- Automatic cut-off, easy change carbon brushes
- Flat metal gear head for excellent visibility of work piece and optimised cutting depth
- Epoxy coating field and armature combat abrasive dust to increase tool lifetime
- New "snap-in" safety guard for keyless adjustment
- Spindle lock, with safety mechanism
- Large surface safety switch



Specification

Power input	1450 watt
No load speed	11.000 грт
Cutting depth	33 mm

Grinding disc Ø	125 mm
Spindle thread	M14
Weight	2,5 kg

Standard Equipment – 4 m cable, additional handle, flange nut, safety guard

















Cat No. WSC 14-125 MX Article No. 4935 4122 33 Version. 220-240 V EAN No. 4002395198368

SMALL ANGLE GRINDER

WSE 14-125 MX

ALSO AVAILABLE: WSE 14-125 MX DMS

Features

- Powerful 1450 watt motor
- Digitronic with variable speed preselection, soft start, motor overload protection and no load speed limitation
- FIXTEC patented nut for fast and easy disc changing
- · Automatic cut-off, easy change carbon brushes
- Flat metal gearhead for excellent visibility of work piece and optimised cutting depth
- Epoxy coating field and armature combat abrasive dust to increase tool lifetime
- New "snap-in" safety guard for keyless adjustment
- Spindle lock, with safety mechanism
- Large surface safety switch



Specification

Power input	1450 watt
No load speed	2600-11.000 грт
Cutting depth	33 mm

M14
2,5 kg





AEG 3 YEARS JAHRE













Standard Equipment - 4 m cable, additional handle, FIXTEC nut, safety guard, flange nut, kitbox

LARGE ANGLE GRINDER

WS 22-180 E

ALSO AVAILABLE: WS 22-180 DMS

Features

- Powerful 2200 W motor with powder field coating for long life time and outstanding performance in all applications
- Extreme compact design with an overall short length of 485 mm and 5,1 kg for most comfortable handling
- Line lock out function to prevent automatic start up after power
- Soft start for smooth startup
- Burst resistant keyed safty guard
- External brush doors for easy access to the brushes for fast servicing

(without Line lock out and Soft start function)

Specification

Power input	2200 watt
No load speed	8500 грт
Cutting depth	43 mm

Grinding disc Ø	180 mm
Spindle thread	M14
Weight	5,1 kg

Standard Equipment – Cable, wrench, flange, flange nut, anti-vibration additional handle, safety guard













Cat No. WS 22-180 E Article No. 4935 4316 90 Version. 220-240 V EAN No. 4002395194858

Cat No. WS 22-180 DMS Article No. 4935 4317 00 Version. 220-240 V EAN No. 4002395194865

LARGE ANGLE GRINDER

WS 22-230 E

Features

- Powerful 2200 W motor with powder field coating for long life time and outstanding performance in all applications
- Extreme compact design with an overall short length of 485 mm and 5,1 kg for most comfortable handling
- Line lock out function to prevent automatic startup after power
- Soft start for smooth start up
- Burst resistant keyed safty guard
- External brush doors for easy access to the brushes for fast

ALSO AVAILABLE: WS 22-230 DMS (without Line lock out and Soft start function)



Specification

Power input	2200 watt
No load speed	6600 грт
Cutting depth	68 mm

Grinding disc Ø	230 mm
Spindle thread	M14
Weight	5,1 kg

Standard Equipment - Cable, wrench, flange, flange nut, anti-vibration additional handle, safety guard













LARGE ANGLE GRINDER

WS 24-180 V

Features

- Powerful 2400 watt motor
- AVS: additional handle for more comfort handling and less strain on body joints
- Epoxy-coated field windings and armature prevents accumulation of abrasive dust, increasing tool life
- High quality sealed bearings provide superior protection
- New "snap-in" safety guard for keyless adjustment
- Convenient three-finger switch with soft start
- Soft start for smooth startup

Standard Equipment – 4 m cable, wrench, flange, flange nut, anti-vibration additional handle, safety guard

Specification

Power input	2400 watt
No load speed	8500 rpm
Cutting depth	43 mm
Grinding disc Ø	180 mm
Spindle thread	M14
Weight	5,3 kg

















Cat No. WS 24-180 V Article No. 4935 4464 90 Version. 220-240 V EAN No. 4002395136285

LARGE ANGLE GRINDER

WS 24-230 V

Features

- Powerful 2400 watt motor
- AVS: additional handle for more comfort handling and less strain on body joints
- Epoxy-coated field windings and armature prevents accumulation of abrasive dust, increasing tool life
- High quality sealed bearings provide superior protection

Standard Equipment – 4 m cable, wrench, flange, flange nut, anti-vibration additional handle, safety guard

- New "snap-in" safety guard for keyless adjustment
- Convenient three-finger switch with soft start
- Soft start for smooth startup

Specification

Power input	2400 watt
No load speed	6600 грт
Cutting depth	68 mm
Grinding disc Ø	230 mm
Spindle thread	M14
Weight	5,4 kg















LARGE ANGLE GRINDER

WS 24-230 GEV

ALSO AVAILABLE: WS 24-230 GV DMS

(without Line lock out)

Features

 Powerful 2400 W motor with powder field coating for long life time and outstanding performance in all applications

- Extreme compact design with an overall short length of 515 mm and 5,6 kg for most comfortable handling
- Line lock out function to prevent automatic start up after power loss
- Soft start for smooth start up
- Burst resistant quick release safty guard for easy adjustment
- AVS equipped motor housing and 2-positions Anti-vibration side handle for less

• 7 step rotating main handle and large soft grip area for most comfortable

• External brush doors for easy access to the brushes for fast servicing

• 4 m rubber cable



Power input	2400 watt
No load speed	6600 rpm
Cutting depth	68 mm
Grinding disc Ø	230 mm
Spindle thread	M14
Weight	5,6 kg



Standard Equipment - 4 m cable, wrench, flange, flange nut, anti-vibration additional handle, safety guard, kitbox





















Cat No. WS 24-230 GEV Article No. 4935 4317 65 Version. 220-240 V EAN No. 4002395194964 Cat No. WS 24-230 GV DMS Article No. 4935 4317 75 Version. 220-240 V DMS EAN No. 4002395194971



DIE GRINDER GS 500 E

Features

- High speed, one handed die grinder
- Variable speed electronic
- Automatic cut-off carbon brushes
- High rotation precision metal gearbox
- Weight only 1,3 kg
- Ergonomic switch



Specification

Power input	500 watt
No load speed	10.000-29.000 грт
Collet diameter	6 mm
Max. grinding wheel	40 mm
diameter	(at 80 m/sec)

Max. grinding pin	20 mm
diameter	(at 45 m/sec)
Weight	1,3 kg

Standard Equipment - Key, 6 mm collet, 4 m cable













Cat No. GS 500 E Article No. 4935 4129 85 Version. 220-240 V EAN No. 4002395192939

DIE GRINDER GSL 600 E

Features

- Variable speed electronic
- Long spindle for easy access to awkward places
- Double bearing spindle seating for smooth rotation
- Automatic cut-off carbon brushes
- High rotation precision metal gearbox
- Weight only 1,9 kg
- Ergonomic switch



Specification

Power input	600 watt
No load speed	10.000-29.000 rpm
Collet diameter	6 mm
Max. grinding wheel	40 mm
diameter	(at 80 m/sec)

Max. grinding pin	20 mm
diameter	(at 45 m/sec)
Weight	1,9 kg

Standard Equipment - Key, 6 mm collet, 4 m cable











POLISHER PE 150

Features

- 1200 watt polisher
- Variable speed electronics for various materials and
- Special gearing for high spindle torque and ideal polishing speed
- Automatic cut-off carbon brushes
- Externally accessible brushes for easy replacement
- Spindle lock
- Large 3 finger switch

Standard Equipment - 4 m cable, additional handle, cap, and backing pad

Specification

Power input	1200 watt
No load speed	900–2500 rpm
Polishing disc Ø	150 mm
Spindle thread	M14
Weight	2,1 kg















Cat No. PE 150 Article No. 4935 4122 66 Version. 220-240 V EAN No. 4002395198443

RIGHT ANGLE SANDER

SE 12-180

Features

- 1200 watt sander with full wave electronics
- Variable speed electronics for various materials and finishing
- High motor torque and optimum speed range for sanding,
 - especially for fine surface work
- Automatic cut-off carbon brushes
- Externally accessible brushes for easy replacement
- Spindle lock
- Large 3 finger switch

Standard Equipment – 4 m cable, additional handle with guard, flange nut, flexible backing pad

Specification

Power input	1200 watt
No load speed	1800–4800 грт
Grinding disc Ø	180 mm
Spindle thread	M14
Weight	2,5 kg



















ABRASIVE METAL CHOPSAW

SMT 355

Features

- Powerful 2300 watt motor
- -45°/0°/45° mitre capacity with quick release mitre clamp
- Spindle lock for easy wheel and accessory changing
- Deflector protects the user from sparks
- Oversize guard for added safety
- On board wrench storage
- Rubber feet for greater stability
- Replaceable carbon brushes




Power input	2300 watt
No load speed	3800 грт
Wheel diameter	355 mm
Bore diameter	25,4 mm
Weight	16,5 kg























Cat No. SMT 355 Article No. 4935 4117 70 Version. 220-240 V EAN No. 4002395129638







POWER THROUGH WOOD

AEG POWERTOOLS woodworking range offers a comprehensive selection of high performance machines to take on the most varied, professional applications. All of these tools offer ease of use, reliability, durability and features to ensure professional efficiency and best results.

THE WOODWORKING RANGE

ROUTERS



PLANER

JIGSAWS

CIRCULAR SAWS

RECIPROCATING SAWS

SANDERS

TABLE SAW

MITRE SAWS AND LEGSTANDS

DUST EXTRACTION
HEAT GUNS





COMBO ROUTER MF 1400 KE

Features

- 2 routers in one for maximum flexibility in all kinds of application
- Soft start to prevent sudden kickback
- Integrated electronics maintain constant speed under load
- Variable speed electronics for optimum control in a wide range of materials
- Large soft-grip handles for decreased vibration and greater comfort
- Flat motor housing with integrated rubber feet for convenient upside down bit change with spindle lock
- Premium collet and shaft design minimises run out
- Built in LED for unparalleled workplace illumination
- Through table depth adjustment for ultimate convenience



FIXED BASE

Standard Equipment - 5 guide bushes, 3 dust extraction adaptors, parallel guide, 2 collets (8/12 mm), 2 keys, oval base, round base, chip shield and contractors bag



Specification

Power input	1400 watt
Collet capacity	8/12 mm
Plunge capacity	64 mm
No load speed	10.000-23.000 rpm
Weight	5 <i>,7</i> kg















Cat No. MF 1400 KE Article No. 4935 4118 50 Version. 220-240 V EAN No. 4002395193295



ROUTER OF 2050 E

Features

- Powerful 2050 watt motor
- Electronic variable speed control
- Plunge depth set by calibrated dial
- Micro depth adjustment
- 3-stage depth stop lock
- Vertical depth adjustment scales



Specification

Power input	2050 watt
Collet capacity	6/8/12 mm
Plunge capacity	66 mm

No load speed	10.000-20.000 rpm
Weight	6,2 kg

Standard Equipment – 4 m cable, 6/8/12 mm collet, spanner, parallel guide, 4 guide bushes, router bit and dust adaptor











 $\textbf{Cat No.} \ \ \mathsf{OF} \ \ 2050 \ \mathsf{E} \ \ \textbf{Article No.} \ \ 4935 \ \ 4036 \ \ 65 \ \ \textbf{Version.} \ \ 220-240 \ \mathsf{V} \ \ \textbf{EAN No.} \ \ 4002395125869$

PLANER PL 750

Features

- Powerful 750 watt motor
- Left and right chip ejection for greater convenience
- Heel shoe protects the base, blade and work surface
- 0,2 mm stage depth adjustment setting for greater control and accuracy
- Depth scale indicator



Specification

Power input	750 watt
No load speed	16.000 грт
Cutting depth	2 mm

Cutting width	82 mm
Max. rebate	12 mm
Weight	2,9 kg

Standard Equipment - 2 blades, edge guide, dust bag, key

















PALM JIGSAW PST 500 X

Features

- Powerful 450 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- LED light for cut line visibility
- Pendulum function
- Unique palm design for use in tight spaces and easy handling
- Dust blower keeps cut line clear for accuracy



Power input	450 watt
No load stroke rate	3680 ѕрт
Mitre cutting angle to	45°
Stroke	15 mm

Pendulum settings	1 Stage
Max. cutting depth in wood/steel/plastic	30/5/15 mm
Weight	1,6 kg

Standard Equipment – Clear dust cap, splintering device, 1 saw blade, 4 m cable and contractors bag



















Cat No. PST 500 X Article No. 4935 4282 60 Version. 220-240 V EAN No. 4002395194315

TOPHANDLE JIGSAW

STEP 90 X

Features

- Powerful 600 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4-Stage pendulum adjustment
- Variable speed electronics for control
- Ergonomic design with integrated soft-grip for comfortable handling
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Base plate can be moved backwards for cutting close to edges and for precise mitre cuts to 45°

Specification

Power input	600 watt
No load stroke rate	1000-3200 spm
Mitre cutting angle to	45°
Stroke	19 mm

Pendulum settings	4 Stages
Max. cutting depth in wood/steel/aluminium	100/8/15 mm
Weight	2,0 kg

Standard Equipment – 4 m cable, blade, anti-splintering guard, dust cap and kitbox







AEG 3 ANNÉES YEARS













BODYGRIP JIGSAW

ST 800 XE

Features

- Powerful 705 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4-Stage pendulum adjustment
- Variable speed electronics for control
- AVS anti-vibration mechanism for user comfort
- Ergonomic slimline bodygrip design with integrated soft-grip
- Dust extraction port
- Dust blower keeps cut line clear for accuracy
- Base plate can be moved backwards for cutting close to edges

Standard Equipment – 4 m cable, blade, anti splintering guard, sliding shoe, dust cap and kitbox



Power input	705 watt
No load stroke rate	600-2700 spm
Mitre cutting angle to	45°
Stroke	26 mm
Pendulum settings	4 Stages
Max. cutting depth in wood/steel/aluminium	110/10/25 mm
Weight	2,3 kg





















Cat No. ST 800 XE Article No. 4935 4129 50 Version, 220-240 V EAN No. 4002395192892

TOPHANDLE JIGSAW

STEP 1200 BX

Features

- Powerful 600 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4-Stage pendulum adjustment
- Variable speed electronics for control
- AVS anti-vibration mechanism for user comfort
- Ergonomic top handle design with integrated soft-grip
- Sawdust blower keeps cutting line clear for accuracy
- Base plate can be moved backwards for sawing close to edges and for precise mitre cuts to 45°

Standard Equipment – 4 m cable, blade, anti splintering guard, sliding shoe, dust cap, suction adaptor and kitbox

Specification

Power input	600 watt
No load stroke rate	500-3000 ѕрт
Mitre cutting angle to	45°
Stroke	26 mm
Pendulum settings	4 Stages
Max. cutting depth in wood/steel/aluminium	110/10/30 mm
Weight	2.4 kg



















Cat No. STEP 1200 BX Article No. 4935 4128 19 Version. 220-240 V EAN No. 4002395192694

BODYGRIP JIGSAW

STEP 1200 XE

Features

- Powerful 730 watt motor
- Patented FIXTEC system for changing saw blades in seconds
- 4-Stage pendulum adjustment
- Variable speed selection for correct speed to match the material and blade
- Soft start prevents sudden kick back of machine on start up
- Integrated electronics allows constant speed under load
- AVS anti-vibration mechanism for user comfort
- Ergonomic and very slim body grip design with integrated soft-grip zone
- Dust extraction port
- Sawdust blower keeps cutting line clear for accuracy
- · Adjustable dust extraction (front or back) over switch
- Base plate can be moved backwards for cutting close to edges and for precise mitre cuts to 45°

Standard Equipment – 4 m cable, 1 saw blade, anti splintering guard, dust cap, suction adaptor and kitbox

Specification

Power input	730 watt
No load stroke rate	500-3000 spm
Mitre cutting angle to	45°
Stroke	26 mm
Pendulum settings	4 Stages
Max. cutting depth in wood/steel/aluminium	135/10/30 mm
Weight	2,4 kg































MULTI CONSTRUCTION MATERIAL SAW

MBS 30 Turbo



Article No. 4932 3525 58 EAN No. 4002395372164





Unique on board active dust collection - patent pending

Features

- 75% dust collection efficiency best in class!
- Comes complete with all dust collection components
- Height adjustment for precise depth setting
- Powerful 1010 watt motor for cutting a wide range of materials quickly and easily
- Ergonomic inline motor design, well balanced for extended use
- Dust sealed gearbox design for optimal performance in dusty environments
- Lightweight magnesium guards and base for less user fatigue during extended use

Standard Equipment – Premium 6 tooth fibre cement saw blade, premium 40 tooth saw blade for accurate cuts in wood, diamond disc for tiles, granite, ceramic, cover & clamp for dust free job site (for 10 | bucket), hose 2,60 m for dust extraction, second flange for

diamond disc, edge guard, allen key for quick saw blade change, delivered in box

• Spindle lock for quick and easy blade changes

Specification

Power input	1010 wat
No load speed	9000 spm
Cutting depth 90°/45°	31/26 mm
Saw blade/Arbor Ø	127/20 mm
Weight	3,4 kg



TS 55 E













Cat No. MBS 30 Turbo Article No. 4935 4118 20 Version. 220-240 V EAN No. 4002395193240

PLUNGESAW

Features

- Powerful 1500 watt motor
- Smooth plunge action for precision cuts
- 55 mm cutting capacity (50 mm with guide rail)
- 0-45° bevel capacity
- Works with all common guide rails
- Soft-grip handle for comfort

Specification

Power input	1500 watt
No load speed	0–1500 spm
Mitre cutting angle to	45°
Max. cutting depth at 90°	55 mm
Max. cutting depth at 45°	50 mm
Saw blade/Arbor Ø	160/20 mm
Weight	4,6 kg





Standard Equipment – 4 m cable, 48 tooth TCT blade, spanner and kitbox







W









165 MM CIRCULAR SAW

KS 55 C

Features

- Powerful 1200 watt motor
- 0-50° bevel capacity with 45° positive position stop
- High strength composite shoe for durability
- Externally accessible brushes for easy replacement

Standard Equipment - Contractors bag, 4 m cable,

parallel fence, 24 tooth TCT blade, spanner

- Integrated dust blower keeps cut line clear for accuracy
- Soft-grip handle for comfort

Specification

Power input	1200 watt
No load speed	6100 spm
Bevel	0-50°
Cutting depth 90/45/50°	54/45/38 mm
Saw blade/Arbor Ø	165/20 mm
Weight	3,7 kg























Cat No. KS 55 C Article No. 4935 4118 30 Version. 220-240 V EAN No. 4002395193141

185 MM CIRCULAR SAW

KS 66 C

Features

- Powerful 1600 watt motor for heavy duty applications
- 56° bevel capacity with 45° positive position stop
- Magnesium upper and lower guard offers lightweight high strength
- Full length kerf indicator for accurate cutting
- Externally accessible brushes for easy replacement

Standard Equipment - Contractors bag, 4 m cable,

parallel fence, 24 tooth TCT blade, spanner

- Integrated dust blower keeps cut line clear for accuracy
- Soft-grip handle for comfort

Specification

Power input	1600 watt
No load speed	5800 spm
Bevel	56°
Cutting depth 90/45/56°	61/49/35 mm
Saw blade/Arbor Ø	185/30 mm
Weight	4,8 kg


























MINI RECIPROCATING SAW

US 400 XE

Features

- Innovative design for confined spaces
- Extremely compact design
- Operational with one hand with exceptional balance
- 3500 strokes per minute and 13 mm stroke length for fast cutting applications
- FIXTEC for fast and easy keyless blade change
- Built-in LED
- 2-Finger variable speed trigger

Standard Equipment - 4 m cable, 3 blades and contractors bag



Power input	400 watt
No load stroke rate	0–3500 spm
Length of stroke	13 mm
Weight	1,7 kg



















Cat No. US 400 XF Article No. 4935 4118 14 Version, 220-240 V EAN No. 4002395193219

RECIPROCATING SAW

US 900 XE

Features

- Powerful 900 W motor, for fast cuts in various materials
- Pendulum function with 19 mm stroke length, for more powerful and faster cutting progress
- Speed regulation from 0-3500 spm, especially needed for heat-sensitive materials
- FIXTEC for fast and easy keyless blade change
- 24% lighter than other saws, for better work control
- One hand blade insertion
- Soft-grip handle, for better ergonomics

Standard Equipment – 4 m cable, 3 blades and

Specification

Power input	900 watt
No load stroke rate	0-3500 spm
Length of stroke	19 mm
Weight	2,9 kg

















Cat No. US 900 XE Article No. 4935 4196 10 Version. 220-240 V EAN No. 4002395193806 **RECIPROCATING SAW**

US 1300 XE

Features

- Powerful 1300 watt motor
- FIXTEC blade clamp for fast and easy blade change
- Variable speed switch for increased cutting control and efficiency
- Adjustable shoe for prolonged blade life
- Ergonomic soft-grip handle design for comfort
- Blades can be turned 180° for various applications

Specification

Power input	1300 watt
No load stroke rate	0–2800 spm
Length of stroke	30 mm
Weight	3,8 kg



Standard Equipment – 4 m cable, 2 blades and kitbox





AEG 3 ANNÉES YEARS JAHRE









RANDOM ORBIT SANDER

EX 125 ES

Features

- Ergonomic & compact 300 watt random orbit sander
- Ideal for working in confined spaces and over head
- Variable speed for optimum control
- Pad brake control: pad brake for a gauge free workpiece
- Convenient hook & loop paper fastening
- Very efficient dust extraction over 8 holes in the base plate
- Dust extraction, with dust bag or absorption system
- Soft-grip on handle

Standard Equipment - 4 m cable, 3 sheets (80, 120, 180 grit) sanding pads and dust bag

Specification

300 watt
7000-15.000 rpm
14.000-30.000 орт
2 mm
125 mm
1,5 kg

















Cat No. FX 125 FS Article No. 4935 4161 00 Version, 220-240 V EAN No. 4002395129799

RANDOM ORBIT SANDER

EX 150 ES

Features

- Dual orbits for control of material removal
- Variable speed for optimum control
- Soft start and pad brake for a gauge free workpiece
- Through-body sealed slide switch for reliability and
- Convenient hook & loop paper fastening
- Dust extraction, with dust bag or absorption system
- Diecast construction for strength and durability
- Micro texture grip for perfect handling

Specification

Power input	440 wat
No load speed	4000-10.000 грп
Oscillation rate	8000-20.000 орп
Oscillation diameter	3,2/6,4 mm
Sanding disc size	150 mm
Weight	2,8 kg



Standard Equipment – 4 m cable, $3 \times 80 \text{ grit sanding}$ pads, dust bag and pommel handle















Cat No. EX 150 ES Article No. 4935 4432 90 Version. 220-240 V EAN No. 4002395135479

PALM DELTA SANDER

FDS 140

Features

- Extremely compact 280 watt sheet sander
- Ideal for working in confined spaces and over head
- Delta base for sanding in corners
- Hook & loop and large release tabs for convenient paper changing
- Magnesium base for more stability and less vibration
- Dust extraction with dust bag or absorption system
- Soft-grip on handle

Specification

280 watt
15.000 rpm
20.000 орт
1,6 mm
115 x 140 mm
1,5 kg



Standard Equipment - 4 m cable, 3 sheets (60, 80, 120 grit) sanding pad, delta base plate and dust bag





AEG 3 ANNÉES YEARS











1/2 SHEET SANDER FS 280

Features

- Powerful 440 watt motor
- Variable speed for optimum control
- Convenient hook & loop paper fastening
- Dust extraction, with dust bag or absorption system

Specification

Power input	440 watt
Oscillation rate	14.000-26.000 орт
Sanding surface	115 x 280 mm
Weight	3,0 kg



Standard Equipment - 4 m cable, 3 sheets (80, 120, 240 grit) sanding pads, dust bag and pommel handle, bag













HBS 1000 E



Cat No. FS 280 Article No. 4935 4192 80 Version. 220-240 V EAN No. 4002395133116

BELT SANDER

Features

- Powerful 1010 watt motor
- Electronic speed for control and optimum results
- Clamping lever for easy, tool free changing of sanding belt
- Externally accessible brushes for easy replacement
- Control wheel for precise adjustment of sanding belt
- Compact design, ideal for sanding close to edges
- Die-cast construction for high strength and durability Dust extraction, with dust bag or absorption system
- Standard Equipment 4 m cable, 1×80 grit sanding belt, dust bag, pommel handle and kitbox

Specification

Power input	1010 watt
Belt length	533 mm
Belt speed	240-450 m/min
Sanding surface	75 x 145 mm
Belt width	75 mm
Weight	5,1 kg

















BBSE 1100



Cat No. HBS 1000 E Article No. 4935 4132 05 Version. 220-240 V EAN No. 4002395197613

BELT SANDER

• Powerful 1100 watt motor

Features

- Extra-large sanding surface 100 x 140 mm
- Full-wave electronics with pre-selection of belt speed
- Control wheel for precise adjustment of belt alignment
- Dust extraction, with dust bag or absorption system

Specification

Power input	1100 watt
Belt length	560 mm
Belt speed	230-400 m/min
Sanding surface	100 x 140 mm
Belt width	100 mm
Weight	5,0 kg

Standard Equipment - 4 m cable, 1 x 100 grit sanding belt and dust bag





AEG 3 YEARS JAHRE









TABLE SAW TS 250 K

Features

- Powerful 1800 watt motor
- 4800 rpm for effortless accurate cutting
- 90 mm cutting depth (53 mm at 45°)
- Dual clamping parallel fence for high stability and accuracy
- Overload protection ensures durability
- Soft start
- Integrated table side extension up to 645 mm gives huge cutting capacity
- Collapsible stand with wheels and height adjustment for easy transportation and portability
- On board storage for all tools and spare blades

Specification

254 x 30 mm
4800 rpm
45°
90/62 mm
41,0 kg

Standard Equipment – 36 tooth TCT blade, rip fence, mitre gauge and fence, collapsible stand with wheels, push stick, wrench















SLIDING COMPOUND MITRE SAW

PS 305 DG

Features

- Powerful 1800 watt motor delivers 4400 rpm
- Large cutting capacities include a massive maximum crosscut of $343 \times 111 \text{ mm at } 90^{\circ}$
- Double bevel 0-47° left or right
- Mitres 60° left or right, perfect for awkward mitres
- Rugged cast construction with huge table area
- Cam operated mitre lock for fast angle adjustment

Specification

Power input	1800 watt
Blade diameter	305 x 30 mm
No load speed	4400 rpm
Mitre capacity (left/right)	60°
Depth of cut	111 mm
Crosscut capacity	343 mm
Weight	31,0 kg

Standard Equipment – 60 tooth 305 mm blade























SLIDE MITRE SAW

PS 254 L

Features

- Internal fan that removes 80% of the dust
- Cut line visibility Adjustable LED and laser
- Blade depth adjustment. Allows for trenching application
- Mitre lock with detent plate Mitre: 50° left or right
- Powerful 2000 watt motor delivers 4500 rpm

Mitre 0° / Bevel 90°	90 x 305 mm
Mitre 45° / Bevel 90°	90 x 215 mm
Mitre 0° / Bevel 45°	50 x 305 mm
Mitre 45° / Bevel 45°	50 x 215 mm

Standard Equipment - 48 tooth blade, clamp, hose, bucket cover, dust bag

Cat No. PS 254 L Article No. 4935 4406 70 Version. 220-240 V EAN No. 4002395134687

Specification

Power input	2000 watt
Blade diameter	254 mm
No load speed	4500 rpm
Mitre capacity (left/right)	50°
Depth of cut	90 mm
Crosscut capacity	305 mm
Weight	19,5 kg























SLIDE MITRE SAW

PS 216 L

Features

- Internal fan that removes 80% of the dust
- Cut line visibility Adjustable LED and laser
- Blade depth adjustment. Allows for trenching application
- Mitre lock with detent plate Mitre: 50° left or right
- Powerful 1500 watt motor delivers 5000 rpm

Mitre 0° / Bevel 90°	65 x 305 mm
Mitre 45° / Bevel 90°	65 x 215 mm
Mitre 0° / Bevel 45°	36 x 305 mm
Mitre 45° / Bevel 45°	36 x 215 mm

Standard Equipment - 48 tooth blade, clamp, hose, bucket cover, dust bag

Cat No. PS 216 L Article No. 4935 4406 50 Version. 220-240 V EAN No. 4002395134656

Specification

216 mm
210 111111
5000 rpm
50°
65 mm
305 mm
16,5 kg























UNIVERSAL MITRE SAW LEGSTAND


PSU 1000

Features

- Extendable to 2,3 m
- Quick release brackets
- Adjustable leg
- Low weight 14 kg
- 180 kg maximum load capacity









Standard Equipment – Tool adaptor, hand tube, $2 \times \text{extension}$ tube, floor nozzle, crevice nozzle, hose $32 \text{ mm} \times 3.5 \text{ m}$, fleece filter bag, disposal bag, accessory box

Product	Specification	Features	Application	Art. No. 4935-	EAN No. 4002395-
AP 250 ECP	Power input max. – 1400 watt Air volume – 3600 l/min Max. vacuum – 190 mbar Container capacity – 25 l Suction hose diameter/length – 32 mm × 3,5 m Weight – 6,0 kg	CLEAR-PRESS filter cleaning system Wet & dry cleaning Wet overfill protection Click system – easy to change accessories Fleece double wall filter bag and disposal bag	Wet & dry dust extraction in external environments, wet cleaning, general cleaning	411880	131051
AP 300 ELCP Dust class L standard MAK-factor > 1 mg/m³	Power input max. – 1500 watt Air volume – 3700 l/min Max. vacuum – 250 mbar Container capacity – 30 l Suction hose diameter/length – 32 mm × 3,5 m Weight – 10,0 kg	CLEAR-PRESS filter cleaning system PET filter cartridge Automatic operation when used with powertools Dust class L for dust rated up to 1 mg/m³ Low noise fan for silent cleaning Wet & dry cleaning Fleece double wall filter bag and disposal bag	Wet & dry dust extraction in external environments, wet cleaning, general cleaning	411890	131068

DUST BUSTING POWER!!!



Accessories	AP 250 ECP	AP 300 ELCP	Art. No. 4932-	EAN No. 4002395-
Filter cartridge	•		352303	369621
Filter cartridge		•	352304	369638
Filter bags: 5 pcs (4 x fleece filter bags, 1 x fleece wet filter with rubber band)	•		352306	369652
Filter bags: 5 x fleece filter bags. Capacity 30 l		•	352307	369669
Extension hose, anti static. 4 m long 36 mm diameter with tool adaptor		•	352311	369706
Extension hose. 3,5 m long 32 mm diameter with tool adaptor	•	•	352312	369713

HEAT GUN HG 560 D

Features

- 2 temperature adjustment modes 300°/560°
- 400-450 l/min
- Reinforced fan for continuous use
- Extremely light product 0,85 kg
- Rubber overmold on back end for safe stationnary use

Specification

Power input	1500 watt
Air flow	400-450 l/min
Temperature control	300/560° C
Weight	0,85 kg





1500 W

Cat No. HG 560 D Article No. 4935 4410 15 Version. 220-240 V EAN No. 4002395134991

HG 600 V **HEAT GUN**

Features

- Electronic precise adjustement of temp from 90° up to 600°
- 300-500 l/min
- Reinforced fan for continuous use
- Extremely light product 0,9 kg
- Rubber overmold on back end for safe stationnary use

Specification

Power input	2000 watt
Air flow	300-500 l/min
Temperature control	90-600° C
Weight	0,9 kg









 $\textbf{Cat No.} \ \ \text{HG } 600 \ \ \textbf{V} \ \ \textbf{Article No.} \ \ 4935 \ \ 4410 \ \ 25 \ \ \textbf{Version.} \ \ 220-240 \ \ \textbf{V} \ \ \textbf{EAN No.} \ \ 4002395135011$

HG 600 VK **HEAT GUN**

Features

- Electronic precise adjustement of temp from 90° up to 600°
- 300-500 l/min
- Reinforced fan for continuous use
- Extremely light product 0,9 kg
- Delivered in case with 3 nozzles
- Rubber overmold on back end for safe stationnary use

Specification

Power input	2000 watt
Air flow	300-500 l/min
Temperature control	90-600° C
Weight	0,9 kg














POWER SET SDS-PLUS DRILL BITS

- High quality 2 cutter carbide tip with 130° tip angle
- The carbide tip is set deeper into the head for a more precise fit and better durability
- 2 flute geometry for rapid material removal
- Surface treated flute eliminates binding for faster drilling and high abrasion resistance
- High quality robust and compact power set with secure lock
- Made in Germany





POWER SET STONE DRILL BITS

- Extra sharp diamond ground carbide tip with 130° angle
- Polished silver and black finish eliminates binding for faster cutting and material removal
- Made from special alloy steel for best precision and robustness
- High quality robust and compact power set with secure lock





	Art. No. 4932-	EAN No. 4002395-
Counter display (6 x sets)	352238	368976
Single Power Set Stone Drill Bits (10pcs) Contents: Ø 4 / 5 / 5,5 / 6 (2pcs) / 7 / 8 (2pcs) / 9 / 10 mm	352239	368983

POWER SET HSS-R (DIN 338) METAL DRILL BITS

- HSS-Rollforged metal drill bits manufactured according to DIN 338
- Oxide coating for improved swarf removal
- Normal point cutting tip with 118° angle
- Standard type N flute design
- High quality robust and compact power set with secure lock

Anni .	III
AN No.	***



	Art. No. 4932-	EAN No. 4002395-
Counter display (6 x sets)	352240	368990
Single Power Set HSS-R Drill Bits (19pcs) Contents: Ø 2 × 49 mm / Ø 2.5 (2pcs) × 57 mm / Ø 3 (2pcs) × 61 mm / Ø 3.5 (2pcs) × 70 mm / Ø 4 (2pcs) × 75 mm / Ø 4.5 (2pcs) × 80 mm / Ø 5 (2pcs) × 86 mm / Ø 6 (2pcs) × 93 mm / Ø 7 × 109 mm / Ø 8 × 117 mm / Ø 9 × 125 mm / Ø 10 × 133 mm	352241	369003

POWER SET HSS-G (DIN 338) METAL DRILL BITS

- Fully ground drill bits according to DIN 338
- Standard tip for cutting geometry with 118° angle
- Standard type N flute design for faster chip removal and faster cutting
- High quality robust and compact power set with secure lock

	Art. No. 4932-	EAN No. 4002395-
Counter display (6 x sets)	352242	369010
Single Power Set HSS-G Drill Bits (19pcs) Contents: Ø 2 x 49 mm / Ø 2.5 (2pcs) x 57 mm / Ø 3 (2pcs) x 61 mm / Ø 3.5 (2pcs) x 70 mm / Ø 4 (2pcs) x 75 mm / Ø 4.5 (2pcs) x 80 mm / Ø 5 (2pcs) x 86 mm / Ø 6 (2pcs) x 93 mm / Ø 7 x 109 mm / Ø 8 x 117 mm / Ø 9 x 125 mm / Ø 10 x 133 mm	352243	369027



POWER SET HSS-G TIN DRILL BITS

- Metal drill bits ground from high speed steel according to DIN 338
- Normal point cutting tip with 118° angle
- Standard type N flute design
- Titanium nitride coating increases cutting speed by 50% and lifetime by 300%
- High quality robust and compact power set with secure lock

	4932-	4002395-
Counter display (6 x sets)	352244	369034
Single Power Set HSS-G TiN Drill Bits (19pcs) Contents: Ø 2 x 49 mm / Ø 2,5 (2pcs) x 57 mm / Ø 3 (2pcs) x 61 mm / Ø 3,5 (2pcs) x 70 mm / Ø 4 (2pcs) x 75 mm / Ø 4,5 (2pcs) x 80 mm / Ø 5 (2pcs) x 86 mm / Ø 6 (2pcs) x 93 mm / Ø 7 x 109 mm / Ø 8 x 117 mm / Ø 9 x 125 mm / Ø 10 x 133 mm	352245	369041



POWER SET LIP & SPUR WOOD DRILL BITS

- Manufactured from chrome vanadium steel according to DIN 7487 E
- Center point guarantees precise positioning
- Sharpened shoulders provide for clean holes avoiding splintering
- High quality robust and compact power set with secure lock





	Art. No. 4932-	EAN No. 4002395-
Counter display (6 x sets)	352246	369058
Single Power Set Lip & Spur Wood Drill Bits (8pcs) Contents: Ø 3 x 60 mm / Ø 4 x 75 mm / Ø 5 x 85 mm / Ø 6 x 97 mm / Ø 7 x 104 mm / Ø 8 x 117 mm / Ø 9 x 120 mm / Ø 10 x 133 mm	352247	369065

POWER SET HSS-G (DIN 338) METAL DRILL BITS & SCREWDRIVING BITS

- Metal drill bits ground from high speed steel according to DIN 338
- Normal point cutting tip with 118° angle
- Standard type N flute design
- Screwdriving bits are milled from S2 steel
- High quality robust and compact power set with secure lock

	4932-	4002395-
Counter display (6 x sets)	352248	369072
Single Power Set HSS-G & Screwdriving bits (35pcs) Contents: Ø 2 / 2,5 / 3 / 3,2 / 3,5 / 4 / 4,5 / 6 / 8 / 10 mm 25 mm length: PH1 (2pcs) / PH2 (2pcs) / PH3 (2pcs) / PZ1 (2pcs) / PZ2 (2pcs) / PZ3 (2pcs) / TX10 (2pcs) / TX15 (2pcs) / TX20 (2pcs) / TX25 (2pcs) / TX30 / TX40 50 mm length: PH2 / PZ2 ½" Hex magnetic bit holder	352249	369089



POWER SET JIGSAW BLADES FOR WOOD & METAL

Wood applications:

T144D - Fast cutting

T101B - Very clean, splinter free cutting

Metal applications:

T118A – Cutting of thin sheet material Ø 1,5–4 mm

T118B - Cutting of thicker material 3-6 mm

High quality robust and compact power set with secure lock

	Art. No. 4932-	EAN No. 4002395-
Counter display (6 x sets)	352252	369119
Single Power Set Jigsaw Wood & Metal (50pcs) Contents: 10 x T 144 D / 10 x T 101 B / 15 x T 118 A / 15 x T 118 B	352253	369126



Art. No.



POWER SET SCREWDRIVING BITS



• COLDfire® is a special hardening treatment for making metals stronger , tougher and more durable. This cryogenic process is a one-time permanent treatment affecting the entire screwdriving bit and it is not just a surface coating. The cryogenic process consists of two steps, firstly the bit is hardened by heating it up to 870° and then freezing the bit down to -148° using a dry nitrogen atmosphere. The result of this process is a bit with exceptional durability

+ 40% stronger - bit tips hold their form and will accept higher torque forces

 + 45% longer life - over the lifetime of a bi 	t one can expect to drive 45% more screws
---	---

43% longer life - over the mentile of a bit offe can expect to arive 43% more screws	4932-	4002395-
Counter display (6 x sets)	352254	369133
Single Power Set Screwdriving Bits (40pcs) Contents: 25 mm length: PH1 / PH2 (2pcs) / PH3 / PZ1 (2pcs) / PZ2 (2pcs) / PZ3 (2pcs) / TX6 / TX7 / TX8 / TX9 / TX10 (2pcs) / TX15 (2pcs) / TX20 (2pcs) / TX25 (2pcs) / TX30 / TX40 / Hex 3 / Hex 4 / Hex 5 / Hex 6 / SL 0,6 × 4,5 / SL 0,8 × 5,5 / SL 1,0 × 5,5 / SL 1,2 × 6,5 50 mm length: PH1 / PH2 / PZ1 / PZ2 / TX10 / TX15 / TX20 1/4" Hex magnetic bit holder	352255	369140



PROFI-BOX HSS-R (DIN 338) METAL DRILL BITS

- HSS-Rollforged metal drill bits manufactured according to DIN 338
- 118° cutting tip angle

Counter display (10 x sets)

Single Profi-Box HSS-R Drill Bits (19pcs)

Ø 1-10 mm in 0,5 mm incrementals

- Oxide coating for improved swarf removal
- Robust metal box







MAXI-MIX DRILL BITS

- Fully ground drill bits according to DIN 338
- Standard tip for cutting geometry with 118° angle
- Standard type N flute design for faster chip removal and faster cutting
- High quality robust and compact power set with secure lock

Art. No. 4932-	EAN No. 4002395-	
352464	371235	
352463	371228	

378340

430173



	4932-	4002395-
Counter display (10 x sets)	352464	371235
Single Maxi-Mix Drill Bits (18pcs) Contents: Stone drill bits: Ø 3 / 4 / 5 / 6 / 8 / 10 mm HSS-R drill bits: Ø 3 / 4 / 5 / 6 / 8 / 10 mm Wood drill bits: Ø 3 / 4 / 5 / 6 / 8 / 10 mm	352463	371228

WB1 SET – SCREWDRIVER ANGLE ATTACHMENT WITH 10 SCREWDRIVING BITS

- Contents: WB1 and screwdriving bits 25 mm PH1/PH2/PZ1/PZ2 (2pcs)/PZ3/TX15/TX20/Hex 4/Hex 5
- Being only 30 mm high it is ideally suited to working in confined and limited spaces
- Fits to all machines. The 1/4" Hex shank fits directly into the chuck preventing slippage
- Magnetic 1/4" Hex reception. Accepts standard 1/4" Hex screwdriving bits
- Adjustable to working situation. 360° variable thumb lever for extra grip

Single WB1 – screwdriver angle attachment with 10 screwdriving bits

- Industrial quality up to 11 Nm torque and 400 min⁻¹
- Tough gears made of special hardened steel






Counter display (10 x WB1 Sets)



Art. No. 4932-	EAN No. 4002395-
430174	378357



MAXI-BIT SCREWDRIVING SET





PROFI-BIT SCREWDRIVING SET

SL 0,6 × 4,5 / SL 0,8 × 5,5 / SL 1,5 × 6,5 / PH1 / PH2 / PH3 / PZ1 / PZ2 / PZ3





Counter display (12 x FIXTEC Nut)

Counter display (20 x sets)

1/4" Hex magnetic bit holder

Single Maxi-Bit screwdriving set (10pcs)

- FIXTEC: Disc changing in seconds, no extra tools required
- 12 seconds from removing the worn disc to fixing a new disc
- Only 8 mm thin, enabling more surface of disc on the material
- Compatible to all manufacturers angle grinders up to 150 mm with standard M14 spindle thread
- · With integrated keyholes, for removal of the nut with a standard pin spanner in the event of the nut becoming too tight




Single FIXTEC Nut













MULTIMIX SET 75PCS – DRILLING AND SCREWDRIVING SET

Art. No. EAN No. 4932-4002395-

373284

352670

Contents:

Contents.
Screwdriving bits 25 mm length

1 x PH 0 / 1 x PH 1 / 3 x PH 2 / 1 x PH 3 / 1 x PZ 0 / 1 x PZ 1 / 3 x PZ 2 / 1 x PZ 3 /

1 x SQ 1 / 1 x SQ 2 / 1 x SQ 3 / 1 x TX 10 / 1 x TX 15 / 1 x TX 20 / 1 x TX 25 / 1 x TX 30 /

1 x TX 40 / 1 x Hex 4 / 1 x Hex 5 / 1 x Hex 6 / 1 x SL 3 / 1 x SL 4 / 1 x SL 5 / 1 x SL 6 /

1 x SL 7 / 1 x SL 8

1/4" Hex magnetic bit holder

Screwdriving bits 50 mm length 1 x PH 2 / 1 x PZ 2 / 1 x SL 4 / 1 x SL 6 / 1 x SL 8

 $1 \times 5 \text{ mm} / 1 \times 6 \text{ mm} / 1 \times 7 \text{ mm} / 1 \times 8 \text{ mm} / 1 \times 10 \text{ mm} / 1 \times 12 \text{ mm}$

Metal drill bits HSS-R DIN 338

2 x 1 mm / 1 x 1,5 mm / 1 x 2 mm / 1 x 2,5 mm / 1 x 3 mm / 1 x 3,5 mm / 1 x 4 mm

Lip & Spur wood drill bits 3×3 mm / 3×4 mm / 2×5 mm / 1×6 mm / 1×7 mm / 1×8 mm / 1×10 mm Countersink with 1/4 " Hex reception 45°

Masonry drill bits

1 x 4 mm / 1 x 5 mm / 1 x 5,5 mm / 3 x 6 mm / 1 x 6,5 mm / 2 x 7 mm / 1 x 8 mm /

 $1 \times 10 \text{ mm} / 1 \times 12 \text{ mm}$



METAL DRILL BITS HSS-G COBALT (DIN 338)

Metal drill bits ground from solid extremely heat resistant cobalt-alloyed high speed steel produced according to DIN 338. Polished finish. Split point shaped cutting tip with 135° angle for improved centering – no center punch required. 5% Cobalt content. Withstands high drilling heat.

Type N flute normal angle.

Suitable for drilling high alloy content steels and metals with tensile strengths over 1000 N/mm² like heat and acid proof steels and stainless steel.

Colour: bronze.

Ø mm	A mm	B mm	Quantity	Art. No. 4932-	EAN No. 4002395-
2,0	49	24	2	430416	380770
3,0	61	33	2	430417	380787
3,2	65	36	2	430418	380794
4,0	75	43	2	430419	380800
4,8	86	52	1	430420	380817
5,0	86	52	1	430421	380824
6,0	93	57	1	430422	380831
7,0	109	69	1	430423	380848
8,0	117	75	1	430424	380855
9,0	125	81	1	430425	380862
10,0	133	87	1	430426	380879
11,0	142	94	1	430427	380886
12,0	151	101	1	430428	380893
13,0	151	101	1	430429	380909



SDS-PLUS DRILL BITS – 2 CUT / 10 PIECE POWER PACKS

High quality 2 cutter carbide tip with 130° tip angle. The carbide tip is set deeper into the head for a more precise fit and better durability. 2 flute geometry for rapid material removal. Surface treated flute eliminates binding for faster drilling and high abrasion resistance. Made in Germany.


Ø	A	В	Quantity	Art. No.	EAN No.
mm	mm	mm		4932-	4002395-
5	110	50	10	352256	369157
5,5	110	50	10	352257	369164
6	110	50	10	352258	369171
6	160	100	10	352259	369188
7	160	100	10	352260	369195
8	110	50	10	352261	369201
8	160	100	10	352262	369218
8	210	150	10	352263	369225
10	160	100	10	352264	369232
10	210	150	10	352265	369249
10	260	200	10	352266	369256
12	160	100	10	352267	369263
12	210	150	10	352268	369270
Power Set 8pcs - S	DS-plus drill bits			352236	368952
with Ø 5 / 6 / 8 x 110) mm and Ø 6 (2 pcs) / 8 ,	/ 10 / 12 x 160 mm			
SDS-plus Starter Se	t			352653	373116
with Ø 6 / 8 / 10 x 10	60 mm, point chisel and fla	t chisel			






SDS-MAX DRILL BITS - 2 CUT

Ø mm	A mm	B mm	Quantity	Art. No. 4932-	EAN No. 4002395-
16	540	400	1	352687	373451
18	540	400	1	352688	373468
20	520	400	1	352689	373475
22	520	400	1	352690	373482
25	520	400	1	352691	373499
28	570	450	1	352692	373505
30	570	450	1	352693	373512
32	570	450	1	352694	373529




SDS-PLUS CHISELS

Description	A	В	Quantity	Art. No.	EAN No.
	mm	mm	Quantity.	4932-	4002395-
Point chisel	200	-	1	352269	369287
Flat chisel	200	20	1	352270	369294
Wide chisel	200	35	1	352271	369300
Set of 3 SDS-plu	us chisels with	pointed, 1 flat, 1	wide chisel	352272	369317



SDS-MAX CHISELS

Description	A	В	Quantity	Art. No.	EAN No.
	mm	mm	202	4932-	4002395-
Point chisel	400	-	1	352685	373437
Flat chisel	400	25	1	352686	373444



ROUTER BIT SET

Description	Quantity	Art. No. 4932-	EAN No. 4002395-
8 mm shank	12	354236	320639






MASONRY DRILL BITS

Carbide tip with diamond ground cutting edges with 130° angle – For drilling in brick and aerated concrete blocks

Ø	A	В	Quantity	Art. No.	EAN No.
mm	mm	тт	Qodininy	4932-	4002395-
4	75	40	1	363591	332410
5	85	50	1	363593	332434
5,5	85	50	1	363595	332458
6	100	60	1	363597	332472
6	150	85	1	367032	333967
7	100	60	1	363599	332496
8	120	80	1	363600	332502
8	200	135	1	363612	332366
10	120	80	1	363602	332526
10	200	135	1	363613	332373
12	150	85	1	363604	332540
Power Set 10pcs - n	nasonry drill bits with Ø	4/5/5,5/6 (2pcs)/7/8	3 (2pcs)/9/10 mm	352239	368983





HIGH PERFORMANCE BI-METAL HOLESAWS / SYSTEM ACCESSORIES

Ø	ø	Art. No.	EAN No.	Ø	Ø	Art. No.	EAN No.	Ø	ø	Art. No.	EAN No.
mm	Inch	4932-	4002395-		Inch	4932-	4002395-		ı Inch	4932-	4002395-
14	%16	367244	335947	38	1 ½	367257	336081	73	21/8	367272	336234
16	5/8	367245	335954	40	1 %16	367258	336098	76	3	367273	336241
19	3/4	367247	335978	43	1 11/16	367259	336104	79	3 1/8	367274	336258
20	25/32	367248	335985	44	1 3/4	367260	336111	83	3 1/4	367275	336265
21	13/16	367249	335992	48	1%	367262	336135	89	3 1/2	367277	336289
22	7/8	367250	336005	51	2	367263	336142	92	3 %	367278	336296
24	15/16	367251	336012	54	21/8	367265	336166	98	37/8	367280	336319
25	1	367252	336029	57	21/4	367266	336173	10:	2 4	367281	336326
27	1 1/16	367253	336036	60	23/8	367267	336180	10:	5 41/8	367282	336333
29	1 1/8	367289	336043	64	21/2	367268	336197	114	4 1/2	367284	336357
30	1 3/16	367254	336050	65	2%16	367269	336203	12	43/4	367285	336364
32	11/4	367255	336067	68	211/16	371580	345250	122	7 5	367286	336371
35	1 3/8	367256	336074	70	23/4	367271	336227	15:	2 6	367288	336395

	Art. No. 4932-	EAN No. 4002395-
FIXTEC arbor $\%'' \times 18 \rightarrow 11$ mm Hex for holesaws Ø 32–152 mm	367421	337422
Arbor $\frac{1}{2}$ x 20 \rightarrow Light duty arbor $\frac{1}{2}$ x 20 Hex 9 for holesaws Ø 14-30 mm	367422	337439
Pilot drill bit long For use with arbor 4932367421	367423	337446
Pilot drill bit short For use with arbor 4932367422	367424	337453





JIGSAW BLADES FOR WOOD / PLASTICS / METAL

Blade length (toothed) mm	Tooth pitch	Ref. No.	Quantity	Analtantan				P.V.C.	METAL	Cu/Ni/Ms/Zn	ALU	Art. No. 4932-	EAN No. 4002395-
3521 44	÷	≃ AE(Application			DEPT	H OF CUT	(mm)			₹ 4	
75	3	T 111 C	5	David autien	5-60			< 4 0			_	352144	367979
3521 4		AEG		Rough cutting	3-60	-	-	₹ 40	-	-	-	352144	30/9/9
50		T 101 AO	5	Fast, clean, curve cutting	< 20	_	< 20	< 15	_	_		352145	367986
3521 4		AI		rasi, clean, corve coning	\ 20		1 20	· 15				332143	307 700
75	4	T 244 D	5	Rough, curve cutting	⟨ 60						-	352146	347003
3521 47		AEC		Rough, corve coming	. 00							032140	00///0
75	4	T 144 D	5	Fast, rough cutting	< 60	-	_	-	-	_	-	352147	368006
3521 48		AEC		r asi, reagin coming								002111	00000
75	2,5	T 101 B	5	Very clean, splinter free cutting	⟨ 30	< 60	-	< 30	-	-	-	352148	368013
3521 49		AEC	ì	, , , ,									
75	4	T 101 D	5	Fast, clean, splinter free cutting	< 60	< 60	-	< 4 5	-	-	-	352149	368020
3521 50		AEG											
55	1,2	T 118 A	5	For thin sheet metal	-	-	-	-	1,5-4	1,5-4	-	352150	368037
3521 51		AEG											
55	2	T 118 B	5	Rougher cuts in metal	-	-	-	-	3-6	3-6	3-10	352151	368044
	20	3		12 piece set in container									
				Suitable for applications in wood	l, cutting wo	ktops and l	aminate floo	oring and m	etals			373494	349944
				Power Set 50pcs – jigsaw bl	ades for w	ood and n	netal						
				10 x T 144 D, 15 x T 118 A, 10	x T 101 B,	15 x T 1 18	В					352253	369126

CIRCULAR SAW BLADES FOR PORTABLE TOOLS

A mm	B mm	Number of teeth	Cutting width (kerf) mm	Fibre cement board	Chipboard	MDF / Fibreboard	Laminated chipboard	Plywood & OSB boards	Plastics	Plasterboard	Non ferrous	Clean/ Fine cut	Art. No. 4932-	EAN No. 4002395-
127	20	6	1,8	✓						✓		✓	352534	371921
127	20	40	1,8		1	✓	✓	✓	✓			✓	352535	371938
160	20	48	2,2		✓	✓	✓	✓	✓			✓	352868	375264
160	20	48	2,2						✓		✓	✓	352869	375271
165	20	24	2,6		✓	✓	✓	✓	✓				430311	379729
165	20	52	2,8		1	✓	✓	✓	✓			✓	430312	379736
184	30	24	1,8		1	/	1	✓	1			✓	352874	375325
190	30	24	2,2		✓	/	1	✓	1				430469	381302
190	30	48	2,8		✓	/	✓	✓	1			✓	430470	381319

CIRCULAR SAW BLADES FOR CORDLESS TOOLS
--

165	15,8	18	1,5	✓	✓	✓	✓	✓	✓	430366	380275

WI	IIKE .	SAVV E	DLADES									
							_					
254	30	48	3,2	✓	✓	✓	✓	✓			430471	381326
254	30	80	3,2						1	✓	430472	381333
305	30	60	3,2	✓	1	/	/	/		✓	430473	381340
305	30	96	3,2						1	✓	430474	381357

RECIPROCATING SAW BLADES FOR WOOD / PLASTICS / METAL

Blade length (toothed) mm	th pitch	Ref. No.	Quantity		Art. No. 4932-	EAN No. 4002395-
Ba (fool	Tooth	Ref	ð	Application	Art. No 4932-	40C
	E6	~~~~~~~	22222222			
150	2,5	S811H	3	All woods, nail embedded wood, plaster board 3–100 mm, non-ferrous metals, aluminium 3–10 mm, plastic pipes	318127	301959
	VIII I		~~~~			
150	4,2	S744D	2	Fast scroll cutting 6-100 mm	323801	304240
	AEG	nnnn	nnn			
150	4	S644D	2	Fast cutting of wood and plastic, plunge cutting, 6–100 mm	323800	304233
AFR AFR		www	w	mmmmm		
240	8,5	S1542K	2	Special hardened teeth design, fast coarse cut, as well for green and fire wood, 20–180 mm	323804	304271
		mmmm	mm			
300	4,2	S1344D	2	Fast cutting large timbers and plastic, clean cut, 6–250 mm	323802	304257
	EG		222222222			
150	1,4	S922EF	3	For all metals with a wall thickness between 1,5–4 mm	354792	324477
	EG		~~~~~			
150	1,8	S922BF	3	For all metals with a wall thickness between 3–10 mm	354789	324446
1	AEG					
230 (Coarse gr	it S1130R	2	For abrasive materials, fibreglass materials (polyesters, epoxies, melamines), cast iron pipes	373386	348817
_		A TOTAL STATE OF THE STATE OF T				
AE		الماليات				
450	17	-	1	For abrasive materials ie. bricks, soft abrasive blocks	430447	381081
_0_A	EG		سسس			
300 400	4,2	_	1	For cutting of frozen materials	430448 430449	
400	4,2	_		For cutting of frozen materials	430449	301104

GUIDE RAIL

Description	Art. No. 4932-	EAN No. 4002395-
GR 1400 Guide rail 1400 mm long. Supplied with carry-bag. Adaptors to fix guide rail to following machines: MBS 30: 4931 4118 18, KS 55 C (only suitable for machines with production date after 6/2010) / KS 66 C (only suitable for machines with production date after 8/2011): 4931 4165 18, CS 60: 4931 4165 18	352558	372164
Connector piece For combining two guide rails together	352559	372171
Clamps Set of 2 clamps for fixing the guide rail to the work material	352560	372188

351862



ATTACHMENTS


Description	Art. No.	EAN NO.
Description	4932-	4002395-

Xtractor

The ideal dust extraction solution.

The Xtractor can be used with all household vacuum cleaners and industrial dust extraction units with a hose diameter from 26-41 mm. 373501





ACCESSORIES FOR OSCILLATING TOOL

Universal blade reception makes AEG blades compatible with most popular oscillating tools.

A mm	B mm	Qty	Art. No. 4932-	EAN No. 4002395-
28	40	1	430315	379767
28	40	1	430316	379774
9	40	1	430317	379781
88	20	1	430319	379804
85	20	1	430318	379798
		9	430314	379750
		2	4931441298	872541
	28 28 9 9 88	28 40 28 40 9 40 88 20	mm mm Qry 28 40 1 28 40 1 9 40 1 88 20 1 85 20 1	mm Mm Qry 4932- 28 40 1 430315 9 40 1 430317 88 20 1 430319 85 20 1 430318 9 430314


Description	Grit	A×B mm	Qty	Art. No. 4932-	EAN No. 4002395-
® Sanding pad		93 x 93	1	430320	379811
 1 Opc Set: Sanding paper Hook&Loop 4 x Grit 60 3 x Grit 80 3 x Grit 120 Application: Wood, PVC. Sanding small areas, e.g. in corners, along edges, in reareas and tight spaces, sanding down of surface blemis 		93 x 93	10	430321	379828

























ABRASIVE PAPER – HOOK & LOOP FOR FDS 140

Perforated sanding discs for wood, metal, paint, lacquer, plaster.

Grit type: fused alumina, half-open. Artificial resin-bonded on special tear-resistant paper.

Grit	A	A B Qty	Otr	Art. No.	EAN No.
On	mm	mm	Qiy	4932-	4002395-
60	115	107	10	352420	370795
80	115	107	10	352421	370801
120	115	107	10	352422	370818
240	115	107	10	352423	370825




ABRASIVE PAPER – CLAMP TYPE FOR FDS 140

Perforated sanding discs for wood, metal, paint, lacquer, plaster.


Grit type: fused alumina, half-open. Artificial resin-bonded on special tear-resistant paper.

Grit	A mm	B mm	Qty	Art. No. 4932-	EAN No. 4002395-
60	115	140	10	352424	370832
80	115	140	10	352425	370849
120	115	140	10	352426	370856
240	115	140	10	352427	370863



ABRASIVE DELTA PAPER - HOOK & LOOP FOR FDS 140

Grit	A mm	B mm	Qty	Art. No. 4932-	EAN No. 4002395-
60	110	88	10	352925	375837
80	110	88	10	352926	375844
120	110	88	10	352927	375851
240	110	88	10	352928	375868



ABRASIVE DISCS - HOOK & LOOP Ø 150 MM - 6 HOLES

Perforated sanding discs for wood, metal, paint, lacquer, plaster.

Grit type: fused alumina, half-open. Artificial resin-bonded on special tear-resistant paper.

Grit	Ø mm	Qty	Art. No. 4932-	EAN No. 4002395-
40	150	5	430454	381159
60	150	5	430455	381166
80	150	5	430456	381173
120	150	5	430457	381180
180	150	5	430458	381197
240	150	5	430459	381203



Description	Ø mm	Height	Quantity	Art. No. 4932-	EAN No. 4002395-	
Polishing backing pad Application: Reception of felt-/lambswool polishing discs and polishing sponges. Characteristics: M 14 thread, break resistant with integrated soft and flexible foam layer, Hook & Loop fixation.	150	25	1	430450	381111	Ø
Lambswool polishing disc Application: Finishing high gloss polishing. Requires polishing backing pad. Characteristics: Natural lambs wool, very soft and adaptable, Hook & Loop fixation.	150	-	1	430453	381142	
Polishing sponge – hard Application: Polish up of weather-beaten lacquer, lacquer re-conditioning. Requires polishing backing pad. Characteristics: Medium hard, fine pored, with rounded edge, Hook & Loop fixation.	150	50	1	430452	381135	
Polishing sponge – soft Application: Second polish of lacquer, lacquer care. Requires polishing backing pad. Characteristics: Super-soft, fine pored, with rounded edge, Hook & Loop fixation.	150	50	1	430451	381128	

BASE PLATES

Description	Ø mm	No. of holes	Art. No. 4932-	EAN No. 4002395-
Base plate for EX 125 ES Complete with rubber ring as spare.	125	8	352870	375288
Base plate for EX 150 E Complete with rubber ring as spare.	150	6	352871	375295





INDEX

CORDLESS SYSTEMS	06-27	CHARGERS	27
OMNIPRO	10-11	AL 1214G 12-14,4 V	27
18 V POWER	12-17	AL 1218G 12-18 V	27
BSB 18 Li 18 V Premium Hammerdrill/Driver	12	BL 1218 12-18 V	27
BSB 18C Li 18 V Compact Hammerdrill/Driver	12	LL 1230 12 V	27
BSB 18 G2 Li 18 V Hammerdrill/Driver	13	LA 036 3,6 V	27
BS 18 G2 Li 18 V Drill/Driver	13	IIAAAAAB CYCHAAC	
BS 18C Li 18 V Ultra Compact Drill/Driver	14	HAMMER SYSTEMS	28-37
BSS 18C Li-0 18 V Ultra Compact Impact Wrench	14	ROTARY HAMMERS	31
BSS 18C 12Z Li 18 V Ultra Compact Impact Wrench	15	BH 22 E SDS-PLUS Rotary Hammer	31
BBH 18 Li 18 V SDS-PLUS Hammer	15	BH 24 E SDS-PLUS Rotary Hammer	31
BUS 18 Li-O 18 V Pendulum Action Reciprocating Saw	16		
BKS 18 Li-0 18 V Heavy Duty Circular Saw	16	COMBI HAMMERS	31–36
BST 18X-0 18 V Heavy Duty Jigsaw	17	KH 24 XE SDS-PLUS Combi Hammer	31
BEWS 18-125X 18 V Heavy Duty Angle Grinder	17	KH 26 E SDS-PLUS Combi Hammer	32
		BH 26 LXE SDS-PLUS Combi Hammer	32
14,4 V POWER	18–19	KH 28 Super XE SDS-PLUS Combi Hammer	33
BSB 14C Li 14,4 V Compact Hammerdrill/Driver	18	PN 3500 X SDS-PLUS Combi Hammer	34
BSB 14 G2 Li 14,4 V Hammerdrill/Driver	18	KH 5 E SDS-MAX Combi Hammer	35
BS 14C Li 14,4 V Compact Drill/Driver	19	KH 5 G SDS-MAX Combi Hammer	35
BS 14 G2 Li 14,4 V Drill/Driver	19	PN 11 E SDS-MAX Large Combi Hammer	36
12 V POWER	20-24	CHIPPING HAMMERS	34-36
BSB 12 G2 Li 12 V Hammerdrill/Driver	20	PM 3 SDS-PLUS Chipping Hammer	34
BS 12 G2 Li 12 V Drill/Driver	20	MH 5 E SDS-MAX Chipping Hammer	35
BBS 12C2 Li KIT 12 V Sub Compact Drill Driver	21	MH 5 G SDS-MAX Tradesman Chipping Hammer	36
BSB 12C2 Li 12 V 2-speed Ultra Compact Percussion Drill	22		
BS 12C2 Li 12 V 2-speed Ultra Compact Drill/Driver	22	LARGE DEMOLITION HAMMERS	36
BS 12C Li 12 V Ultra Compact Drill/Driver	23	PM 10 E SDS-MAX Large Demolition Hammer	36
BSS 12C Li 12 V Ultra Compact Impact Driver	23		
BBH 12 Li 12 V Cordless Hammer	24	DRILLING SYSTEMS	38-45
3,6 V POWER	25	ROTARY DRILLS	40
SE 3.6 Li 3,6 V Inline Screwdriver	25	BE 650 R Rotary Drill	40
JE 0.0 El 0,0 V lillille ociewalivel	25	BE 705 R Rotary Drill	40
SPECIALS	25	B4-1050 ST Rotary Drill	40
Flashlights/Battery Lamps 12/14,4/18 V	25	PERCUSSION DRILLS	41-43
		SBE 500 R Percussion Drill	41
BATTERIES & CHARGERS	26-27	SBE 570 R Percussion Drill	41
BATTERIES	27	SBE 600 R Percussion Drill	41
L1840R 18 V Li-lon 4,0 Ah	27	SBE 650 R Percussion Drill	42
L1830R 18 V Li-lon 3,0 Ah	27	SB2-650 Percussion Drill	42
L1820R 18 V Li-lon 2,0 Ah	27	SB2E 750 RX ST High Torque Percussion Drill	42
L1815R 18 V Li-lon 1,5 Ah	27	ERGOMAX L-Shape Percussion Drill	43
B1817G 18 V NiCd 1,7 Ah	27	SB 20-2E Percussion Drill	43
B1814G 18 V NiCd 1,4 Ah	27	SB 22-2E Percussion Drill	43
L1430R 14,4 V Li-lon 3,0 Ah	27		
L1420R 14 V Li-loп 2,0 Ah	27	DIAMOND DRILL	44
L1415R 14,4 V Li-lon 1,5 Ah	27	DB 1500-2 E Dry Diamond Drill	44
B1414G 14,4 V NiCd 1,4 Ah	27		
L1240 12 V Li-lon 4,0 Ah	27	WALL CHASER	44
L1230 12 V Li-lon 3,0 Ah	27	MFE 1500 Wall Chaser	44
L1220 12 V Li-loπ 2,0 Ah	27		
L1215 12 V Li-lon 1,5 Ah	27	SCREWDRIVERS	45
L1215R 12 V Li-lon 1,5 Ah	27	S 2500 E Self Drilling Screwdriver	45
M1230R 12 V NiMH 3,0 Ah B1214G 12 V NiCd 1,4 Ah	27 27	S 4000 E Drywall Screwdriver	45
SL 3.6 3,6 V Li-lon 1,5 Ah	27		
SB 3.6 3,6 V NiCd 1,4 Ah	27		
·			

METALWORKING	46-59	SANDERS	69-70
SMALL ANGLE GRINDERS	49-53	EX 125 ES Random Orbit Sander	69
WS 6-115 Small Angle Grinder	49	EX 150 ES Random Orbit Sander	69
WS 6-125 Small Angle Grinder	49	FDS 140 Palm Delta Sander	69
WS 9-115 Small Angle Grinder	50	FS 280 ½ Sheet Sander	70
WS 9-125 Small Angle Grinder	50	HBS 1000 E Belt Sander	70
WS 11-115 Small Angle Grinder	51	BBSE 1100 Belt Sander	70
WS 11-125 Small Angle Grinder	51 52	TABLE SAW	71
WS 12-125 XE Small Angle Grinder		TS 250 K Table Saw	<i>7</i> 1
WSC 14-125 MX Small Angle Grinder	53		
WSE 14-125 MX Small Angle Grinder	53	MITRE SAWS	72-73
LABOT ANGLE ORINIDEDS	5.4.5.4	PS 305 DG Sliding Compound Mitre Saw	72
LARGE ANGLE GRINDERS	54–56	PS 254 L Slide Mitre Saw	73
WS 22-180 E Large Angle Grinder	54	PS 216 L Slide Mitre Saw	73
WS 22-230 E Large Angle Grinder	54		
WS 24-180 V Large Angle Grinder	55	MITRE SAW LEGSTAND	73
WS 24-230 V Large Angle Grinder	55	PSU 1000 Universal Mitre Saw Legstand	73
WS 24-230 GEV Large Angle Grinder	56	100 1000 omroisa. mino sam Logorana	, 0
		VACUUM CLEANERS	74
DIE GRINDERS	57	AP 250 ECP 25 Vac	74
GS 500 E Die Grinder	57	AP 300 ELCP 30 Vac	74
GSL 600 E Die Grinder	57	74 000 	, .
	50	HEAT GUNS	75
POLISHER	58	HG 560 D Heat Gun	75
PE 150 Polisher	58	НG 600 V Heat Gun	75
		HG 600 VK Heat Gun	75
SANDER	58		
SE 12-180 Right Angle Sander	58	ACCESSORIES	76-87
ABRASIVE/METAL CHOPSAW	59	ACCESSORY SETS / COUNTER DISPLAYS	76-80
SMT 355 Abrasive Metal Chopsaw	59	METAL DRILL BITS HSS-G COBALT (DIN 338)	80
333 Abrasive Meiai Chopsaw	39	SDS-PLUS DRILL BITS - 2 Cut / 10 Piece Power Pack	81
WOODWORKING	60-75	SDS-MAX DRILL BITS - 2 Cut	81
		SDS-PLUS CHISELS	81
ROUTERS	62–63	SDS-MAX CHISELS	81
MF 1400 KE Combo Router	62	ROUTER BIT SET	81
OF 2050 E Router	63	MASONRY DRILL BITS	82
		BI-METAL HOLESAWS / SYSTEM ACCESSORIES	82
PLANER	63	JIGSAW BLADES WOOD / PLASTICS / METAL	83
PL 750 Planer	63	CIRCULAR SAW BLADES FOR PORTABLE TOOLS	83
		CIRCULAR SAW BLADES FOR CORDLESS TOOLS	83
JIGSAWS	64-65	MITRE SAW BLADES	83
PST 500 X Palm Jigsaw	64		
STEP 90 X Tophandle Jigsaw	64	RECIPROCATING SAW BLADES WOOD / PLASTICS / METAL	84
ST 800 XE Bodygrip Jigsaw	65	GUIDE RAIL	84
STEP 1200 BX Tophandle Jigsaw	65	ATTACHMENTS	84
STEP 1200 XE Bodygrip Jigsaw	65	ACCESSORIES FOR OSCILLATING TOOL OMNIPRO	85
		ABRASIVE PAPER – HOOK & LOOP	86
CIRCULAR SAWS	66-67	ABRASIVE PAPER – CLAMP TYPE	86
MBS 30 Turbo Multi Construction Material Saw	66	ABRASIVE DELTA PAPER – HOOK & LOOP	86
TS 55 E Plungesaw	66	ABRASIVE DISCS – HOOK & LOOP Ø 150 MM – 6 HOLES	86
KS 55 C 165 mm Circular Saw	67	POLISHING ACCESSORIES – HOOK & LOOP Ø 150 MM	87
KS 66 C 185 mm Circular Saw	67	BASE PLATES	87
RECIPROCATING SAWS	68		
US 400 XE Mini Reciprocating Saw	68		
US 900 XE Reciprocating Saw	68		
US 1300 XE Reciprocating Saw	68		



CORDLESS/HAMMERS/DRILLING METALWORKING/WOODWORKING ACCESSORIES

AEG POWERTOOLS promises to draw upon its heritage and deliver exciting, high performance, innovative working solutions for the professional tradesmen of today and the future.

AEG POWER TOOLS

P.O. Box 320 D-71361 Winnenden Germany

Tel.: +49 71 95 12-0 Fax: +49 71 95 12-666

A&M Middle East

P.O Box 61254 Jebel Ali Free Zone South Dubai, UAE

> Tel: +97148861399 Fax: +97148861400

www.aeg-powertools.com



AEG POWERTOOLS reserve the right to change all data including images, specifications and service and warranty information without notice. AEG POWERTOOLS will hold no liability for printing errors or mistakes.